




# HEAT SHIELD INSTALLATION

The Steelmade Heat Shield is recommended for stoves with touchscreen controls to protect the plastic from damage that may be caused by heat rising from the back of the Flat Top when in use. The included adhesive backed magnets make installing and removing the Heat Shield quick and easy.

Peel the protective plastic shipping film off of the Heat Shield. The Heat Shield arrives with two strips of adhesive-backed magnets. For your convenience, the first strip is already applied to the shield. The second strip will be attached directly to your range to complete installation.

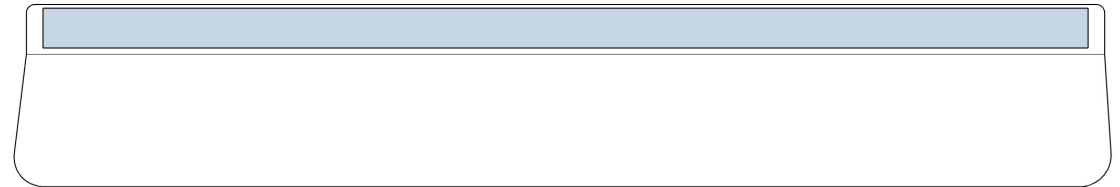

Installation may vary by stove model. Most commonly, there is a gap below the control unit where the Heat Shield will slip into and be held in place by the attached magnets. Prepare the install area by cleaning the area with a degreaser or cleaning product of your choice. Once clean, wipe the area with alcohol to remove any residue for better adhesion of the magnetic strip. Remove the backing paper from the magnetic strip, center the magnet on the install location, and firmly press into position.

If you have questions about your specific model of stove please send a photo of your stove to our support team via email at [info@steelmadeusa.com](mailto:info@steelmadeusa.com) and they can assist in locating the ideal place for installation.

You can leave the Heat Shield installed even when you're not using the Flat Top or you can easily remove it for storage.

