



CUSHION REMOVAL INSTRUCTION

SUZUKI JIMMY XL REAR



To install these covers, the rear cushion will need to be removed.

THINGS REQUIRED



Socket wrench

10 mm socket piece



This fitting can be completed with
1 person.

During fitment do not pull excessively on velcros, breaking them will void warranty.


HEADREST COVER INSTALLATION

HEADREST COVER INSTALLATION

Step 1 : For neoprene covers you will need to turn the cover inside out, align the seams and then roll the cover over the headrest. Canvas covers do not need to be turned inside when fitted.

Step 2 : Attach the velcros on the underside of the headrest.


Do not put headrests back into the seat, store them somewhere while the rest of the parts are being fitted.

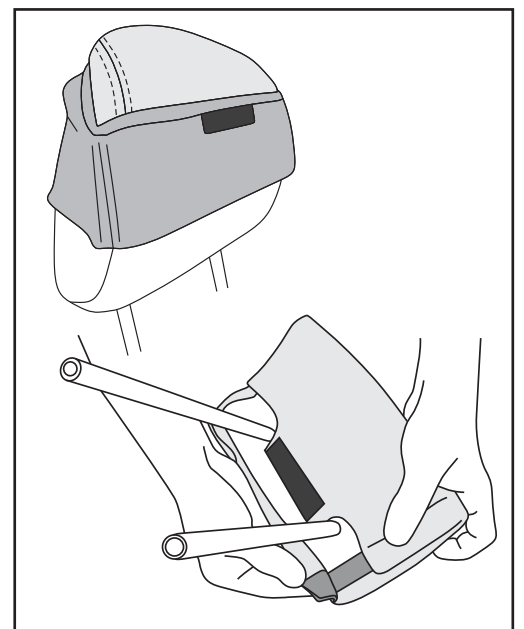


BACKREST COVER INSTALLATION

BACKREST INSTALLATION


Step 1 : If fitting neoprene covers, the cover needs to be turned inside out before fitting (just like the headrest fitting technique). Release the seat forward slightly and fit the backrest cover.

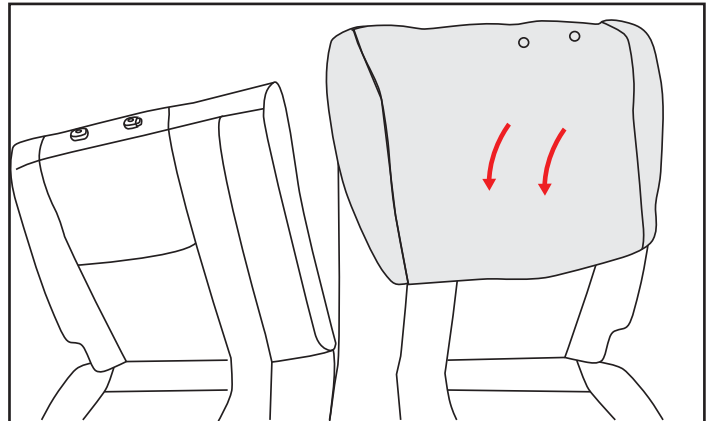


Step 2 : Push the cover underneath the headrest hole plastics. This will help line up the backrest cover with the rest of the seat.

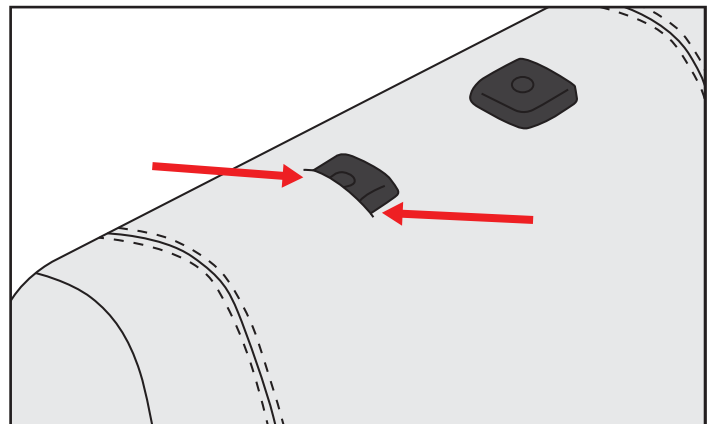

Step 3 : Push the cover between the gap in the backrest and cushion and attach the velcros at the rear of the seat.

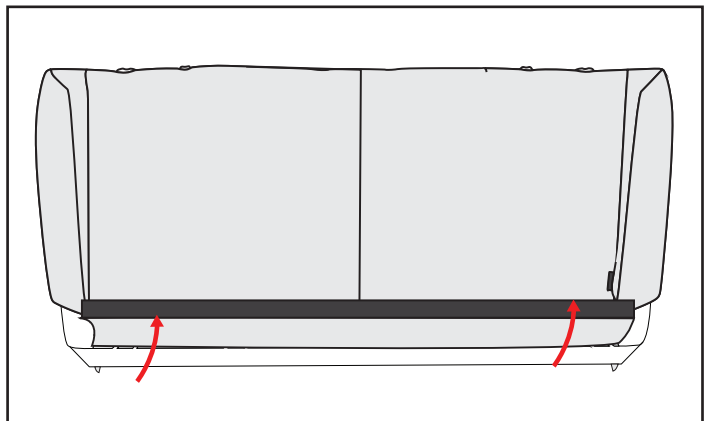


Step 4 : Put the headrests back in the backrest and return the backrest to the upright position.

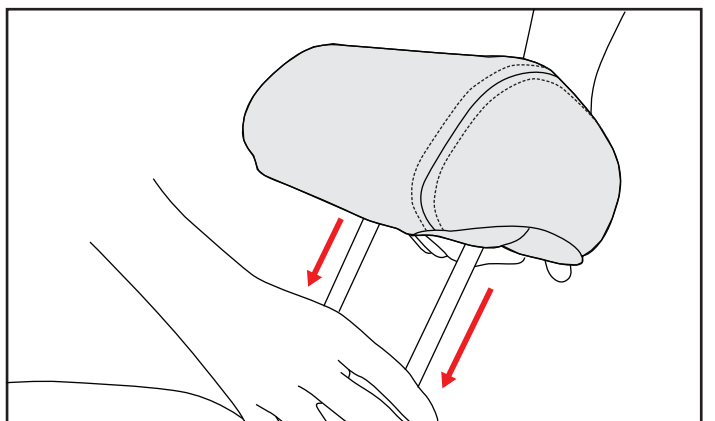


HOW TO REMOVE CUSHION


Step 1 : On the boot floor there are two black plastic plugs that hold the boot floor panel down, pop them out and put them to one side.

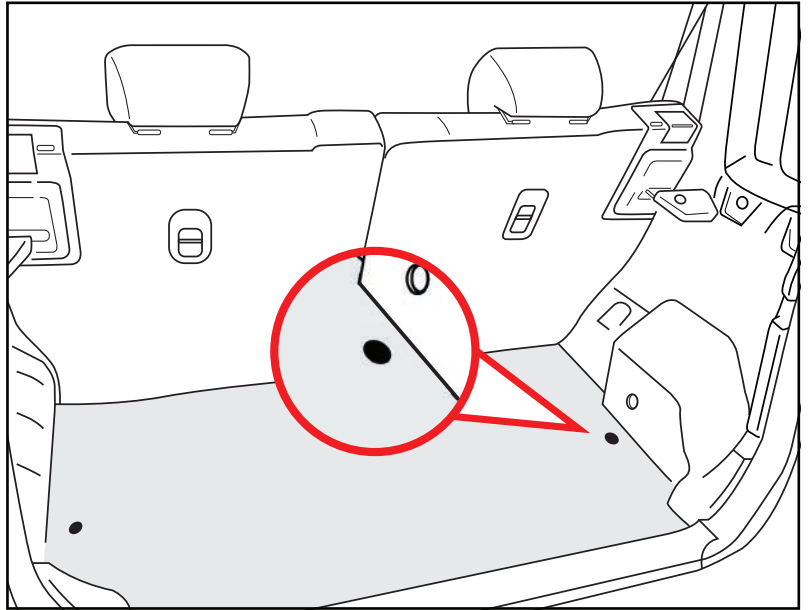

Step 2 : You will be able to fold up the boot floor panel and remove it from the vehicle.

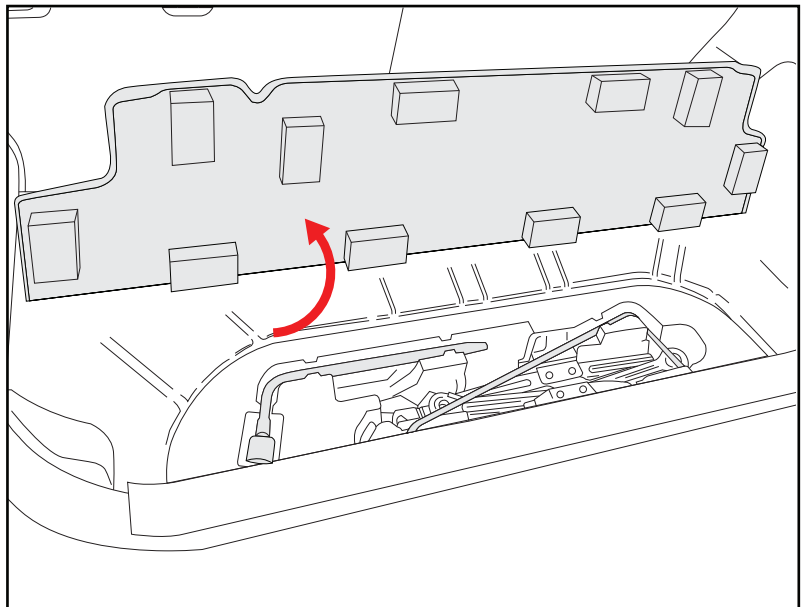


Step 3 : There are two 10 mm bolts fastening the cushion of the seat to the floor of the car. Undo these bolts put them to one side.


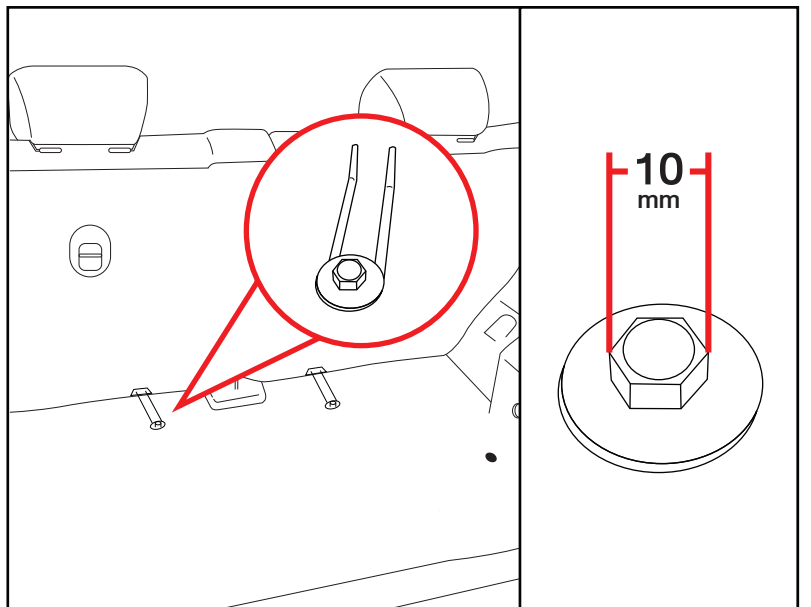


HOW TO REMOVE CUSHION


Step 4 : Come around to the front of the seat cushion and lift the cushion, there are two plugs in which the cushion is connected.

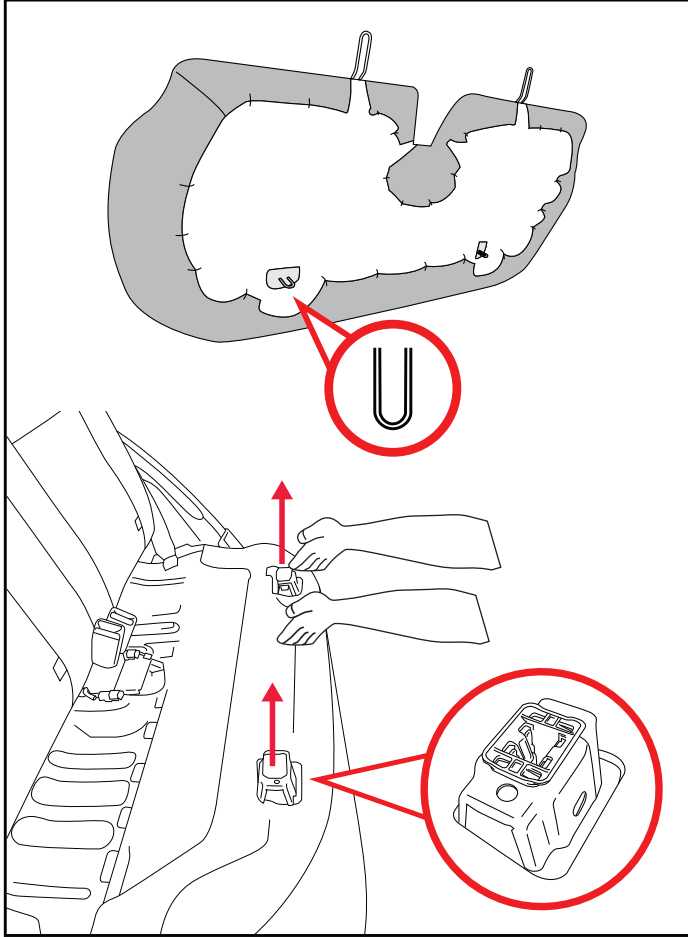

Step 5 : Fit the seat cover, ensuring to fasten the velcros underneath the seat.

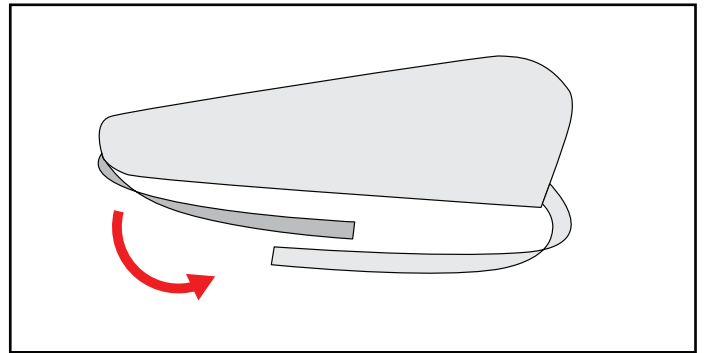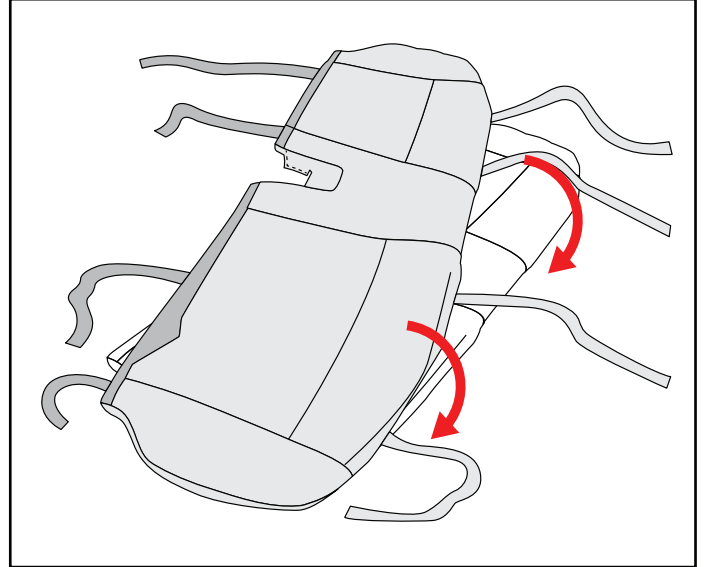

Step 6 : Pop the seat back into it's plugs, you will hear when the cushion is in the correct position.

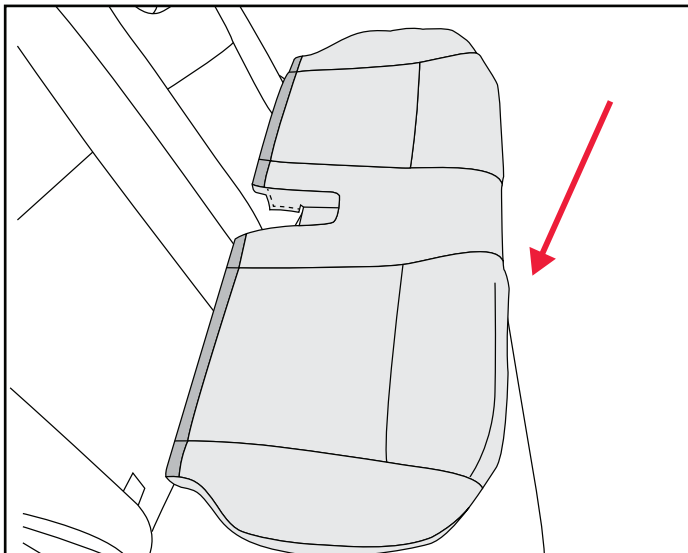

Step 7 : Put the bolts back in place at the rear of the seat and tighten. Put the boot floor panel back in position and reattach the plastic plugs.

