



Fitting Time
20 Minutes.



FITTING INSTRUCTIONS

FRONT SEAT COVER FITTING INSTRUCTIONS

Thank you for purchasing a RB Genuine Accessory.
For proper installation and use of this product please read this publication carefully.
Keep this publication for reference when maintenance is required.

Attention

Disclaimer

This document provides additional information that facilitates installation and care.


- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact the Razorback team or your dealer for clarification.

Safety Notes.


- Check that all installation work practices comply with safety standards.
- Please wear appropriate clothing and use safety equipment.



Parts Supplied.



Headrest Cover x2



Seat Cover x2

Important



Pictures shown in the following steps are for illustrative purposes only. Steps apply to both driver and passenger side seats.


RAZORBACK4X4.COM.AU

15 The Crossway, Cambellfield, VIC 3061

HEADREST REMOVAL


1. Remove the headrest by pressing the release button and sliding the headrest upwards (Fig 1) .

Note: While fitting some models, you will need to push a pin into the small hole at the base of the headrest pole (Fig 2).

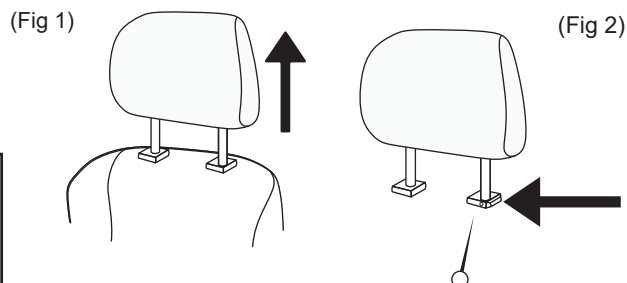

BACKREST COVER


1. IMPORTANT: Check care label inside the seat base, it will identify driver and passenger side (Fig 3).

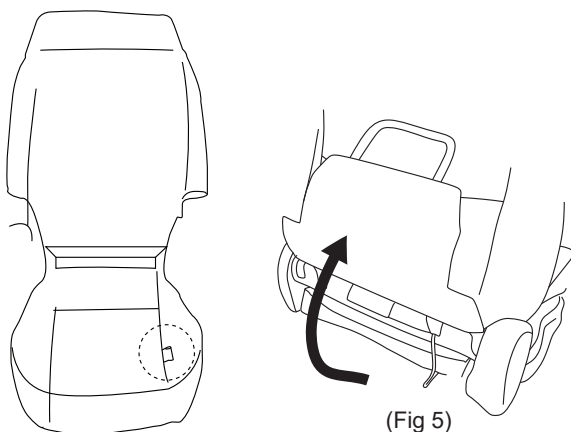

(Fig 3)

2. Unhook & lift the fabric flap from behind and/or beneath the front seats if applicable (Fig 5).

3. Ensure the airbag tag is facing outward from the center of the car as this will ensure correct fitment (Fig 4).

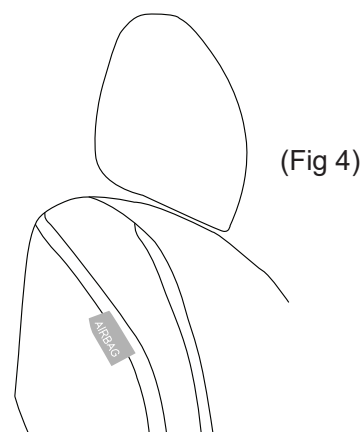


(Fig 4)

WARNING:


Improper installation of this component will result in failing of car safety systems. Ensure proper installation.*1

4. Align holes to the headrest points, and slide the backrest cover from both sides over seat backrest (Fig 6).

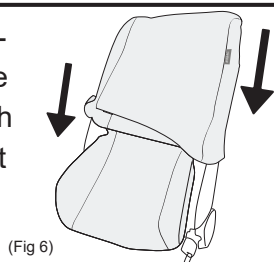

(Fig 6)

5. Using your fingers, push the backrest cover under headrest guide mechanisms to hold the backrest cover in place and ensure it is centrally aligned (Fig 7).




(Fig 7)

Note: Neoprene covers should be turned inside out and rolled down seat


*1 See warnings and maintenance document.

CUSHION COVER

1. Feed the central seat cover (including rod if there is one) between the seat backrest and base. If your cover has fabric loops, use these to pull the cover through. (Fig 8).

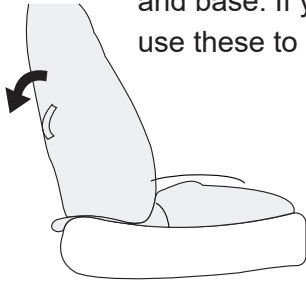


(Fig 8)

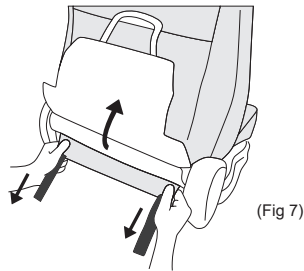

(Fig 7)

DO NO PULL FROM VELCRO.
Hold fabric securely and finesse
the cover through the gap.

2. Roll cushion cover over the seat base and align to seat contours.




(Fig 9)

3. Connect to the velcro tape behind the backrest cover to their intended male/female counterparts or to the carpet on the back of the seat.
4. Where possible, tuck the sides of the base cover in-between the seat base and plastic trimming surrounding the base. Do not use sharp objects for this part of the fitting - blunt plastic implements or fingers are advised.

HEADREST COVER

Note: Neoprene headrest covers should be turned inside out and rolled down headrests.

1. Align headrest covers to the seams on your headrest. For neoprene, roll down the inverted cover following the seam lines. Canvas you can carefully pull down the headrest cover. (Fig 10) .
2. Close up velcros on the underside of the cover.
3. Re-insert the headrest to the seat.
4. Repeat all steps for remaining drivers or passenger seat cover.

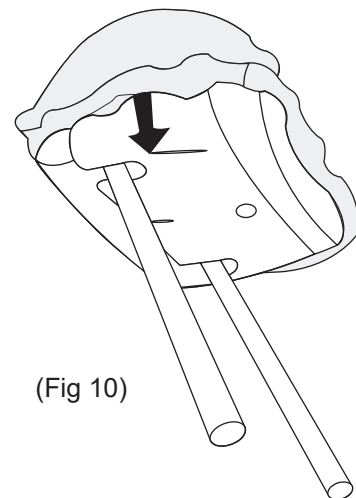

(Fig 10)



SAFETY AND MAINTAINANCE

SAFETY INFORMATION

WARNING

*1 Razorback 4x4 pass strict Australian Design Rules safety testing and standards. If car seat covers are not installed exactly as instructed Razorback 4x4 accepts no liability for any injuries or damages that occur as a result of improper fitment.

- Do not fit car seat covers to wrong seats or incorrect vehicle.
- Only install car seat covers on clean car seats.
- If you encounter any issues with your installation, contact the Razorback 4x4 team for assistance.



Operation, maintenance, and service requirements are covered in the instruction manual. Read the entire instruction manual before fitting seats.



Do not expose product to naked flames.



Do not use any sharp implements when installing seat covers, only hands.



The seatcovers are UV rated, however try to avoid prolonged sun exposure to extend product life.



Do not spray chemicals or solvents on or near seat covers.

MAINTAINANCE AND CLEANING INFORMATION

Avoid Machine Washing Razorback Products

Razorback seat covers are impregnated with specialised dyes and solutions. When machine washed, particularly at temperature, this will reduce the functionality of these material properties. For the longevity of your purchase, DO NOT MACHINE WASH. Please follow the below instructions to ensure the product's longevity.

The process for cleaning your Razorback 4x4 product:

- Vacuum all surfaces paying particular attention to the seams to remove all loose dust, dirt and grime.
- Use a damp cloth (neoprene) or sponge (canvas) to wipe the surface, removing any remaining dust, dirt and grime.
- With a new clean cloth, wipe down all surfaces to ensure that it is sufficiently dry.



It is essential to regularly clean your covers using the above methods to ensure that they do not become compromised through wear.

DO NOT DRY/CLEAN. Due to the dyes and solutions used during this product's manufacture this cleaning process will destroy the product.

Depending on care taken during cleaning process, the product surface may fade slightly after cleaning.