



Fitting Time
20 Minutes.



FITTING INSTRUCTIONS

FRONT SEAT COVER FITTING INSTRUCTIONS

Thank you for purchasing a RB Genuine Accessory.
For proper installation and use of this product please read this publication carefully.
Keep this publication for reference when maintenance is required.

Attention

Disclaimer

This document provides additional information that facilitates installation and care.



- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact the Razorback team or your dealer for clarification.

Safety Notes.

- Check that all installation work practices comply with safety standards.
- Please wear appropriate clothing and use safety equipment.



Parts Supplied.



Backrest Cover x2 Cushion Cover x2

Important




Pictures shown in the following steps are for illustrative purposes only. Steps apply to both driver and passenger side seats.

RAZORBACK4X4.COM.AU

15 The Crossway, Cambellfield, VIC 3061

CUSHION COVER


1. Check care label inside the seat base to identify driver and passenger side (Fig 2).

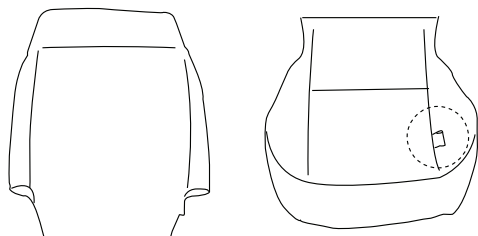

(Fig 2)


Note: Neoprene covers should be turned inside out and rolled over cushion

2. Turn base cover inside out, place and align over seat cushion (Fig 3).

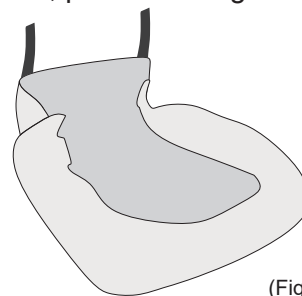


(Fig 3)

3. Set seat incline to as far forward as possible and feed the back of the cover in between the seat backrest and base (Fig 4).

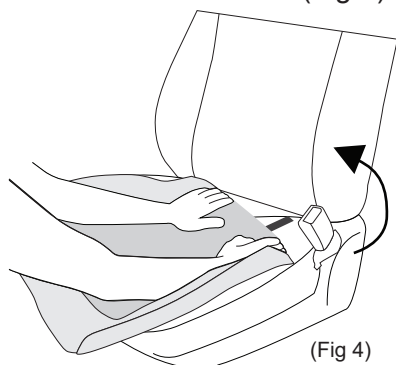

(Fig 4)

4. Pull the cover over the seat base and align to seat contours (Fig 5). Fix velcros underneath chair to their intended male/female counterparts or car carpet.

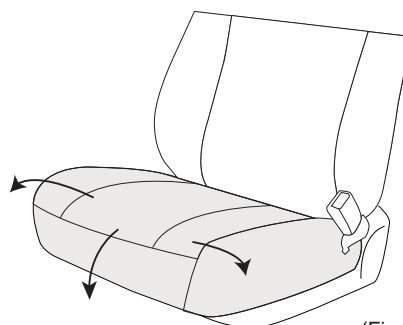


(Fig 5)

BACKREST COVER


Note: Neoprene covers should be turned inside out and rolled down seat

1. Slide the backrest cover from both sides over seat backrest (Fig 6).

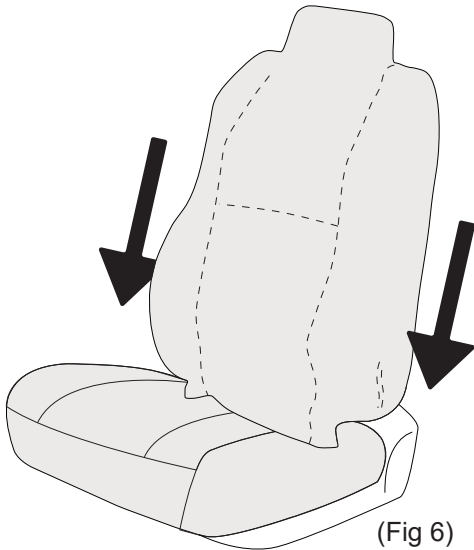

(Fig 6)

2. Push bottom of backrest cover through in between the backrest and the base. From the back of the seat, pull middle part of the backrest cover through in between the seat backrest and base to hang out the back (Fig 7).

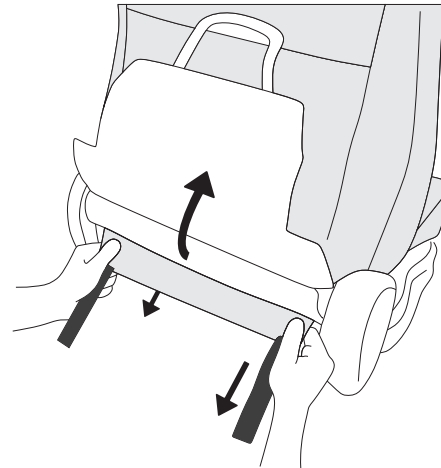

(Fig 7)

DO NO PULL FROM VELCRO.
Hold from fabric securely and finesse
the cover through the gap.

Repeat steps all steps for remaining drivers or passenger
seat cover.

SAFETY AND MAINTAINANCE

SAFETY INFORMATION	MAINTAINANCE AND CLEANING INFORMATION
WARNING *1 Razorback 4x4 pass strict Australian Design Rules safety testing and standards. If car seat covers are not installed exactly as instructed Razorback 4x4 accepts no liability for any injuries or damages that occur as a result of improper fitment.	Avoid Machine Washing Razorback Products Razorback seat covers are impregnated with specialised dyes and solutions. When machine washed, particularly at temperature, this will reduce the functionality of these material properties. For the longevity of your purchase, DO NOT MACHINE WASH. Please follow the below instructions to ensure the product's longevity.
- Do not fit car seat covers to wrong seats or incorrect vehicle. - Only install car seat covers on clean car seats. - If you encounter any issues with your installation, contact the Razorback 4x4 team for assistance.	The process for cleaning your Razorback 4x4 product: - Vacuum all surfaces paying particular attention to the seams to remove all loose dust, dirt and grime. - Use a damp cloth (neoprene) or sponge (canvas) to wipe the surface, removing any remaining dust, dirt and grime. - With a new clean cloth, wipe down all surfaces to ensure that it is sufficiently dry.
 Operation, maintenance, and service requirements are covered in the instruction manual. Read the entire instruction manual before fitting seats.  Do not expose product to naked flames.  Do not use any sharp implements when installing seat covers, only hands.  The seatcovers are UV rated, however try to avoid prolonged sun exposure to extend product life.  Do not spray chemicals or solvents on or near seat covers.	 It is essential to regularly clean your covers using the above methods to ensure that they do not become compromised through wear. DO NOT DRYCLEAN. Due to the dyes and solutions used during this product's manufacture this cleaning process will destroy the product. Depending on care taken during cleaning process, the product surface may fade slightly after cleaning.