



Fitting Time
20 Minutes.



FITTING INSTRUCTIONS

CONSOLE ORGANISER FITTING INSTRUCTIONS

Thank you for purchasing a RB Genuine Accessory.
For proper installation and use of this product please read this publication carefully.
Keep this publication for reference when maintenance is required.

Attention

Disclaimer

This document provides additional information that facilitates installation and care.


- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact the Razorback team or your dealer for clarification.

Safety Notes.

- Check that all installation work practices comply with safety standards.
- Please wear appropriate clothing and use safety equipment.



Parts Supplied.



Console Organiser Cover x1

Important



Pictures shown in the following steps are for illustrative purposes only. Steps apply to both driver and passenger side seats.

RAZORBACK4X4.COM.AU


15 The Crossway, Cambellfield, VIC 3061

Adhesive tape instructions

Please clean the surface of your centre console to remove any dirt, dust or grease before applying the adhesive tape. It is advisable to wipe contact points with surface cleaner and let dry before fitting. If using any cleaners, always test on small inconspicuous location before wiping down entire organiser.


****New cars come with greasy top coat on plastic - you will have to perform this step for adhesive to stick.****

1. Clean your vehicle's centre console by using a dry cloth. (Fig 1) .

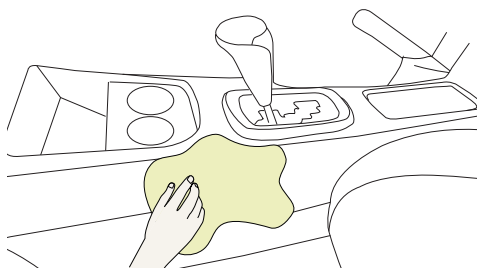


(Fig 1)

2. Arrange the cover to the correct position and attach white plastic clip under the plastic enclosure. (Fig 2) .

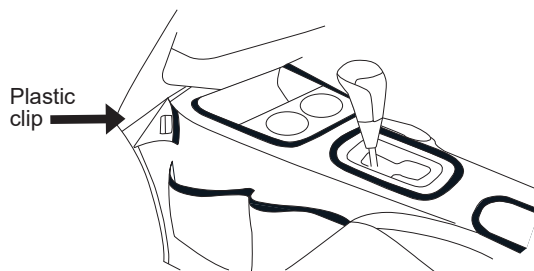


(Fig 2)

3. Attach both sides of the Velcro at the rear of the centre console organizer together. (Fig 3) .

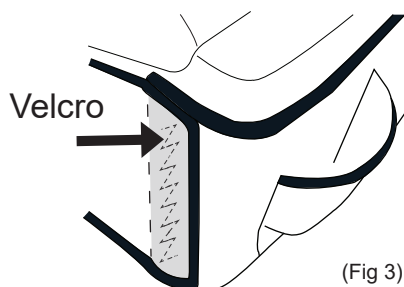

(Fig 3)

4. Place the adhesive tape on the centre console to line up with the Velcro, then attach the cover to the adhesive tape. (Fig 4) .

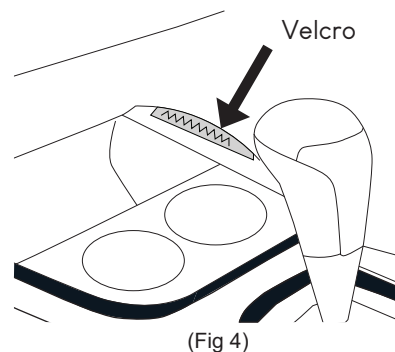

(Fig 4)

SAFETY AND MAINTAINANCE

SAFETY INFORMATION

WARNING

*1 Razorback 4x4 pass strict Australian Design Rules safety testing and standards. If car seat covers are not installed exactly as instructed Razorback 4x4 accepts no liability for any injuries or damages that occur as a result of improper fitment.

- Do not fit car seat covers to wrong seats or incorrect vehicle.
- Only install car seat covers on clean car seats.
- If you encounter any issues with your installation, contact the Razorback 4x4 team for assistance.



Operation, maintenance, and service requirements are covered in the instruction manual. Read the entire instruction manual before fitting seats.



Do not expose product to naked flames.



Do not use any sharp implements when installing seat covers, only hands.



The seatcovers are UV rated, however try to avoid prolonged sun exposure to extend product life.



Do not spray chemicals or solvents on or near seat covers.



MAINTAINANCE AND CLEANING INFORMATION

Avoid Machine Washing Razorback Products

Razorback seat covers are impregnated with specialised dyes and solutions. When machine washed, particularly at temperature, this will reduce the functionality of these material properties. For the longevity of your purchase, **DO NOT MACHINE WASH**. Please follow the below instructions to ensure the product's longevity.

The process for cleaning your Razorback 4x4 product:

- Vacuum all surfaces paying particular attention to the seams to remove all loose dust, dirt and grime.
- Use a damp cloth (neoprene) or sponge (canvas) to wipe the surface, removing any remaining dust, dirt and grime.
- With a new clean cloth, wipe down all surfaces to ensure that it is sufficiently dry.



It is essential to regularly clean your covers using the above methods to ensure that they do not become compromised through wear.

DO NOT DRYCLEAN. Due to the dyes and solutions used during this product's manufacture this cleaning process will destroy the product.

Depending on care taken during cleaning process, the product surface may fade slightly after cleaning.

