


RENEGADE BINDINGS INSTALLATION GUIDE

FOR EVOLVE RENEGADE DECK

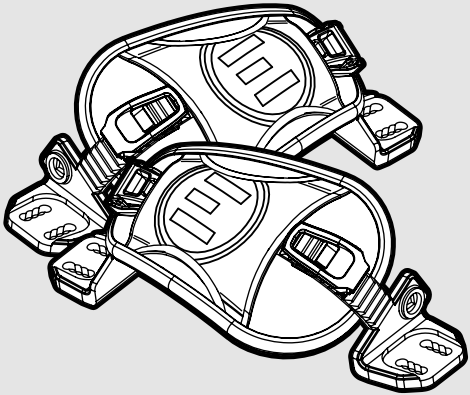

evolve

⚠️ WARNING

TO PREVENT SERIOUS INJURY OR DEATH

READ and UNDERSTAND
User Manual before riding.




- **ALWAYS** wear your helmet with chin strap securely buckled. Athletic shoes, elbow pads and kneepads are recommended for additional protection.
- **ALWAYS** ride within your limits and the limits of your board. **ALWAYS** ride your board at speeds at which you are comfortable without power or brakes.
- **NEVER** ride under the influence of drugs or alcohol.
- **KEEP AWAY** from motor vehicle traffic.
- **ALWAYS** watch out for pedestrians.
- **ALWAYS** ride in areas away from fixed or moving hazards, such as poles, walls, curbs, and parked vehicles.
- **NEVER** ride in the rain. **FIRE** hazard. **ALWAYS** dispose of your battery if it gets wet or is exposed to water.

BINDINGS KIT COMPONENTS:

1. Binding O1
2. Binding O2
3. Mounting Plate x 2
4. Mounting Screws M5X14MM


OPTIONAL HEEL STRAP (SOLD SEPARATELY)

5. Heel Strap X 2
6. Heel Cam Ladder Strap
7. Heel Ratchet Ladder Strap

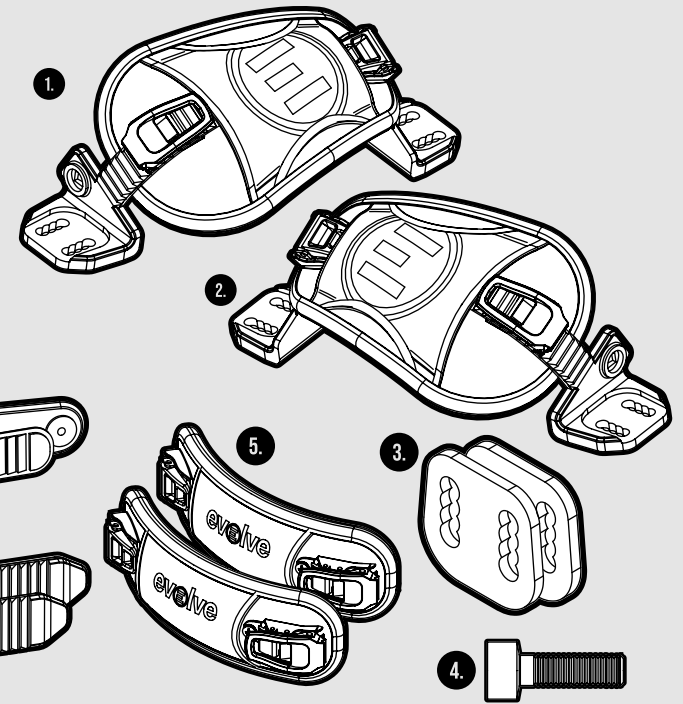

02


BEFORE MOUNTING YOUR BINDINGS DETERMINE YOUR STANCE.
CONSIDER IF YOU ARE REGULAR OR GOOFY.
**BE CAREFUL OF THE BOARD MOVING WHILE TESTING YOUR STANCE.

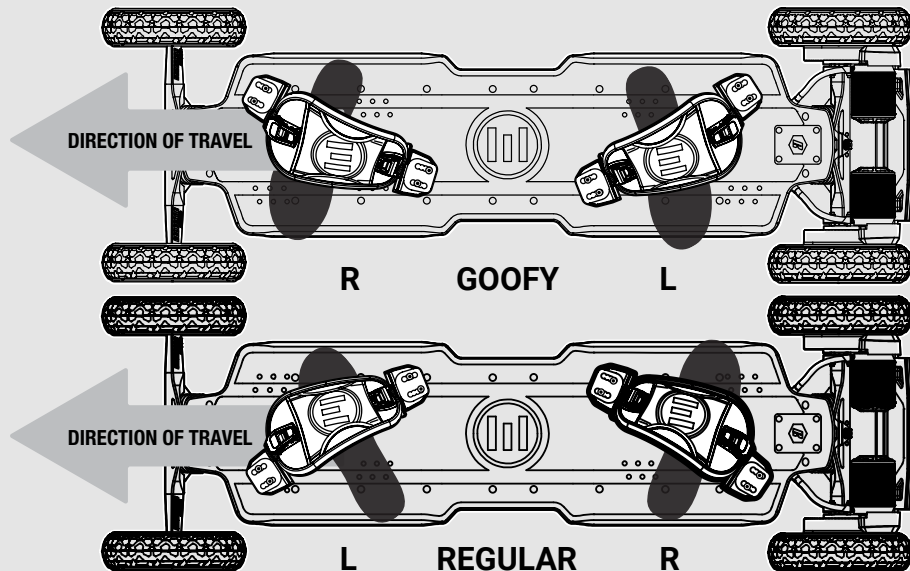

03

The Renegade has a number of pre set mounting points allowing you to adjust the angle and width of your stance. Test the foot positioning that feels right and make note of the corresponding mounting points on the deck.


**BE CAREFUL OF THE BOARD MOVING WHILE TESTING YOUR STANCE.

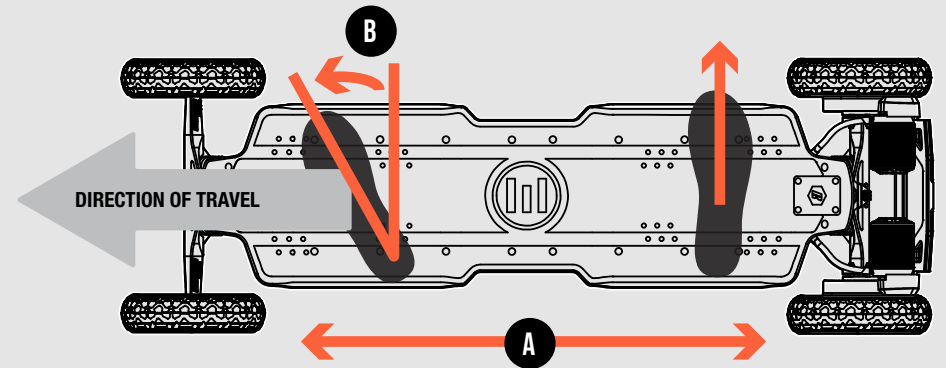

NOTE:


- A) A stance just wider than shoulder width offers control and good stability.
- B) Angling your front foot towards the nose allows you to keep front foot pressure when driving into turns.

04 Align Binding and Mounting Plate to mounting points on deck.

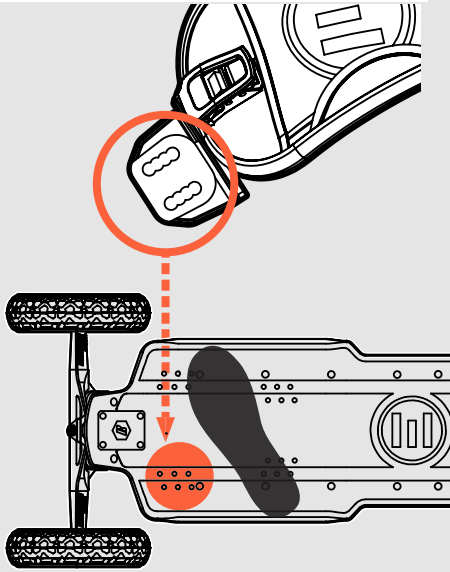


05 Loosely assemble the fasteners and check your stance again before securing the fasteners into position.


Once you are confident in the position - thread lock can be used to ensure a secure connection between bindings and board.

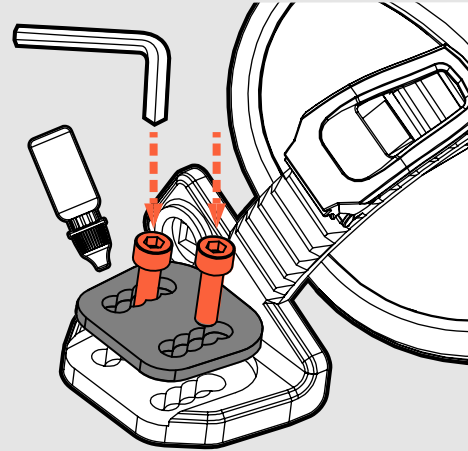


06 To adjust the tightness of the Toe strap. Open the lever on the cam (A) and pull strap through to tighten (B). Ensure cam lever is returned to its down position to secure (C).

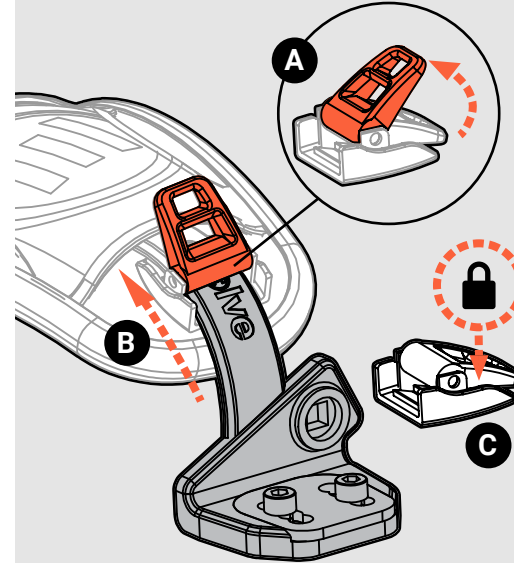


07 To dial in the fit of the Toe Strap. Open the lever on the ratchet (A) and pull the strap through to tighten (B). Ensure lever is in the down position to secure (C).

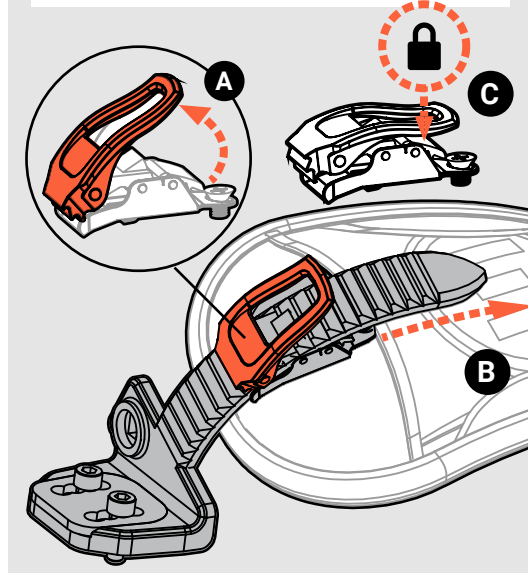


08 **HEEL STRAP INSTALL**
Install cam ladder straps to Heel Strap (A) and ratchet ladder straps to Heel Strap (B).

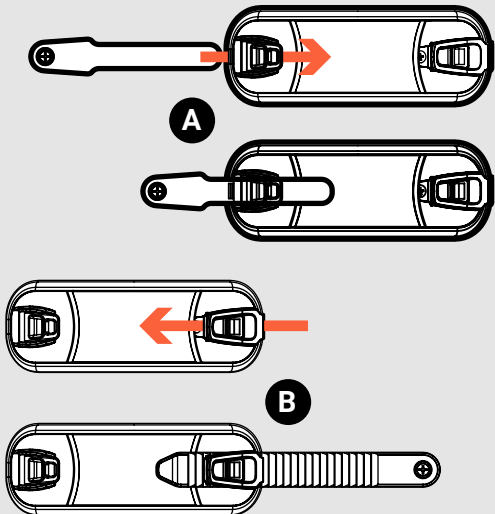

09 Using a phillips head screw driver install the Heel Straps to each side of the bindings.

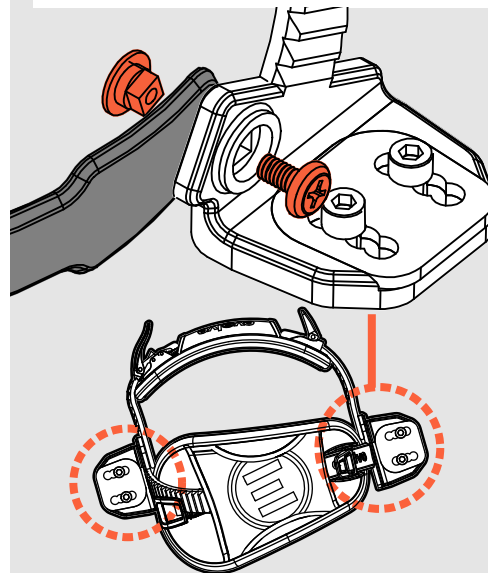

10 To adjust the tightness of the Heel Strap. Open the lever on the cam (A) and pull strap through to tighten (B). Ensure Cam lever is returned to its down position to secure (C). Open lever on the Ratchet (D) and pull strap through to tighten (E). Ensure lever is in the down position to secure (F).

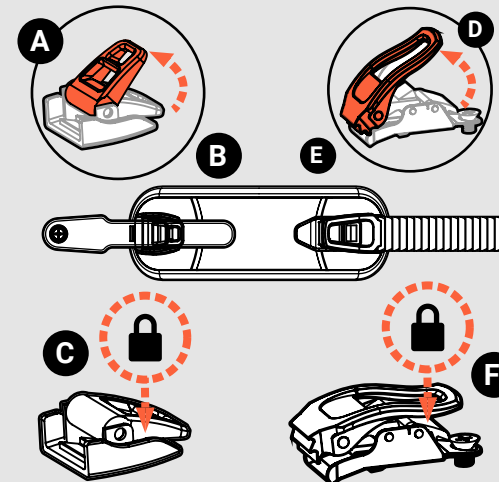

! WARNING

RIDING WITH BINDINGS IS DANGEROUS AND CAN RESULT IN INJURY

BEFORE RIDING

Check all fasteners are secured to the deck.

CHECK that the Toe Pad is secured firmly over each foot and all levers are in the down position.

TEST the mountain board on a flat and safe surface to ensure that the bindings are properly attached and that the board feels stable.

REGULARLY INSPECT THE BINDINGS

Check for any signs of loosening or damage after each ride.

Ensure the screws remain tight and that the bindings are secure to maintain a safe and enjoyable riding experience.