



# SPARTAN EXTENDED HARNESS

## STEP 1

Connect the two extension harnesses to the reverse bars.

## STEP 2

Run the extension harnesses under the truck to the front of the truck and up into the engine bay. (Be sure to secure the extension harness under the truck with the included zip ties so they are not dragging)

## STEP 3

Connect the extension harnesses that were ran to the engine bay to the harness that has the switch.


## STEP 4

Connect your wiring harness to your battery. Remove the nut on the positive terminal of your battery and slide the red positive terminal ring over the bolt then tighten the nut back into place. Remove the nut on the negative terminal of your battery and slide the black negative terminal ring over the bolt then tighten the nut back into place.

## STEP 5

Run the switch past the rubber grommet seen in the photos below. Once you pass the switch through this grommet it will appear at the driver's side footwell. Pull the switch through and mount it on your dash area that you prefer most.

We recommend disconnecting the switch from the harness and sending the white connector through the firewall.

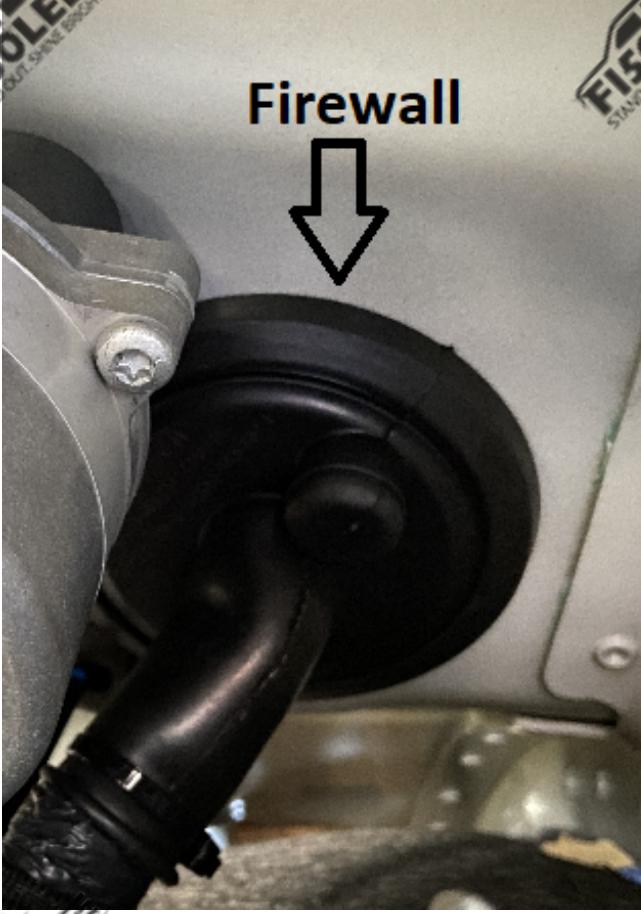



## STEP 6

Once you pass the switch through this grommet it will appear at the driver's side footwell. Pull the switch through and mount it on your dash area that you prefer most.



Now run the male connector from the switch in-between the steering wheel and the plastic piece seen in the photo below.





Once you have done that connect your switch to the harness.



Now mount your switch on your dash in your preferred location.



Possible mounting locations:



Text for support: 706-214-2618

Visit our site to chat: [www.F150LEDs.com](http://www.F150LEDs.com)  
or email [CustomerSupport@F150LEDs.com](mailto:CustomerSupport@F150LEDs.com)

