




PASSENGER KIT FOR SCORPION/HYPERSCORPION

ASSEMBLY GUIDE

© 2021 Juiced Bikes All Rights Reserved R20210120

INTRODUCTION

This assembly guide will cover the installation process for the Scorpion/HyperScorpion Passenger Kit. This kit will allow the e-bike to securely carry passengers. This kit is designed to fit on the Scorpion and HyperScorpion e-bikes.

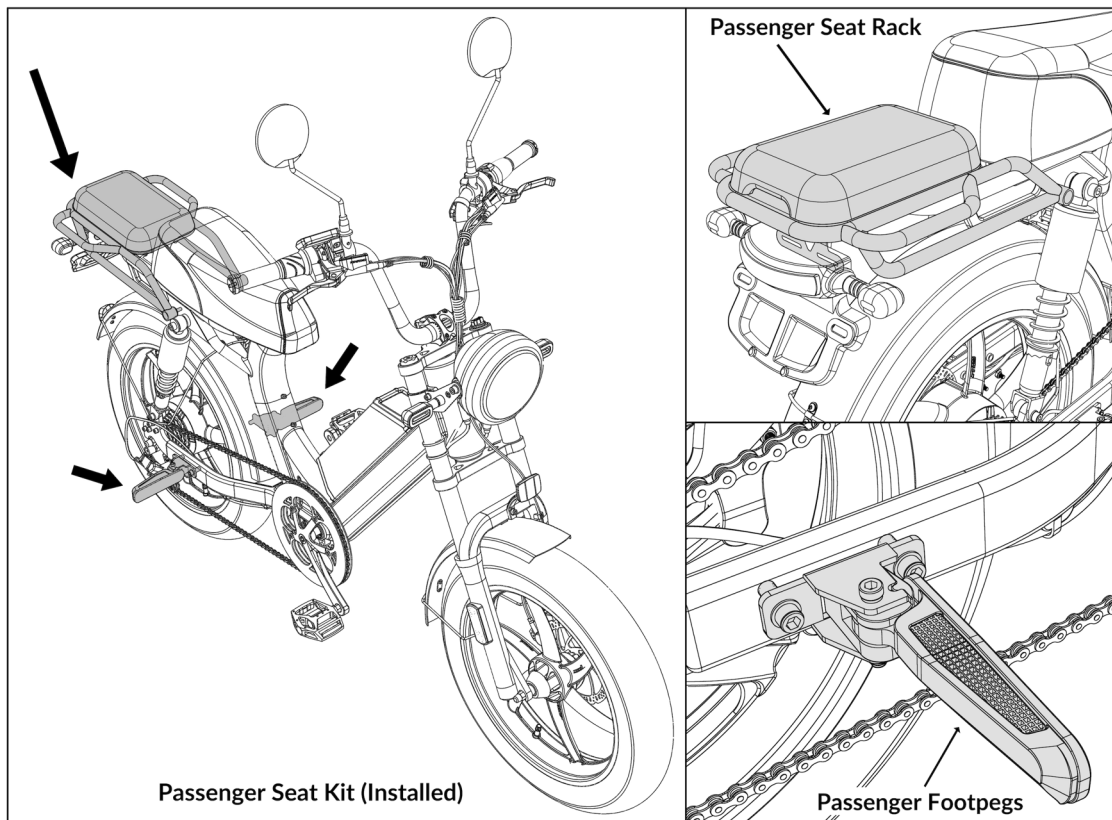

COMPATIBLE E-BIKES

This accessory is compatible with the following bikes

- Scorpion
- Hyper Scorpion
- HyperScorpion Express



360050986212

Scan the QR code with your camera to view this the **Assembly Video** on your smartphone.

ASSEMBLY STEPS

Overview

There are 5 basic steps used to install the Passenger Seat Kit to your Scorpion E-bike.

1. Remove the Rear Light
2. Remove The Standard Rear Rack
3. Install The Passenger Seat Rack
4. Re-Install The Rear Light
5. Install The Right And Left Foot Pegs

1. Remove the Rear Light

To install your Passenger Seat Kit you will need to remove your original Rear Light and rear rack first. The Rear Light will be reinstalled on the Passenger Seat Rack.

Using a 10 mm wrench or socket wrench remove the 2 nuts holding the Rear Light to the rack and remove them with their corresponding washers. These 2 nuts and washers will be used to mount the Rear Light again. You must unplug the connector that connects to the Rear Light.

2. Remove The Standard Rear Rack

Start with a 5 mm Allen wrench and remove the screws securing the Standard Rear Rack on both sides of the bike, just beside the suspension. Then using a 10 mm socket or wrench remove the 2 nuts located just beneath the rack.

3. Install The Passenger Seat Rack

The mounting points for your Passenger Seat Rack are the same as the ones on your Standard Rear Rack. To install your passenger seat, line it up to the holes on the back of the frame where you just removed the Standard Rear Rack.

To secure the Passenger Seat Rack onto the frame, insert on each side a bolt and washer through the passenger seat and frame holes located where the Standard Rear Rack was attached. Screw them in place using a 5 mm Allen wrench.

Now you can finish securing the Passenger Seat Rack by installing the washer and locknut on the threaded studs that secure the seat to the frame on the bottom part of the rack.

4. Re-Install The Rear Light

You can now re-install the Rear Light using the washers and nuts you have previously removed. Reconnect the Rear Light by lining up the connectors and pushing firmly together. Test the Rear Light to insure it is functioning properly before moving to the next step.

5. Install The Right And Left Foot Pegs

To install the Foot Pegs, start by identifying the left and right unit. The rubber covered foot rest should be facing up and the Foot Peg opens towards the front.

Locate the threaded mounting holes on the rear swing arms close to the rear wheel axle. Line up each foot peg to both holes and thread the M8 bolts with a 6 mm Allen wrench. Be sure to install both screws on each foot peg.

Verify the foot peg opens to towards the front and it closes correctly.

Verify all fasteners are torqued and secured before testing your bike.

If you have any questions regarding these instructions, please contact the Juiced Bikes Support Team visiting the Support Center on the [JuicedBikes.com/Support](https://www.juicedbikes.com/support)

IMPORTANT NOTICE

- Riding with a passenger on your e-bike is different than riding by yourself. Be sure to get used to riding before starting your trip. Take into account that acceleration and braking distances are longer with increased payload.
- Do not use Race Track Mode while riding with a passenger. Avoid rapid accelerations and decelerations while carrying a passenger.
- The passenger's feet must be able to rest securely on the passenger Foot Pegs to ensure safe operation. It is not recommended to carry small children on the e-bike.
- The passenger and driver must wear covered shoes while riding on the e-bike.
- Injury can result if the passenger or the passengers clothing comes in contact with the disc rotor.
- Always do a pre trip inspection to confirm all items are secured and tight before riding your e-bike
- Both passenger and driver should always wear a helmet when riding on the e-bike.
- Do not exceed the maximum rated load of the e-bike of 275 lbs (125 kg)
- Do not attempt to lift the bike from the seat. Lift the bike from the handle on the side of the Passenger Seat Rack.