

Thank you again for your purchase. To help you install the projector, please see the below instructions on how to mount it to the bracket.

Step 1: Open the packages which will include the projector mount, the projector itself and 2 additional bolts in a small plastic bag.



Step 2: Unpack the contents and lay them out, make sure you have the small plastic pocket with 2 screws.



Step 3: Extend one of the arms by undoing the hex-screw on top and then redoing it into the 2nd hole in the arm to extend it further.




Step 4: Undo the soft-tipped screws (x2) and prepare the 2 screws from the plastic sleeve. Layout the 4 arms as per below photo to be ready to attach the projector.



Step 5: Insert the screws and washers to attach the arms to the projector.



Step 6: Ensure all screws are tightened to secure the projector.

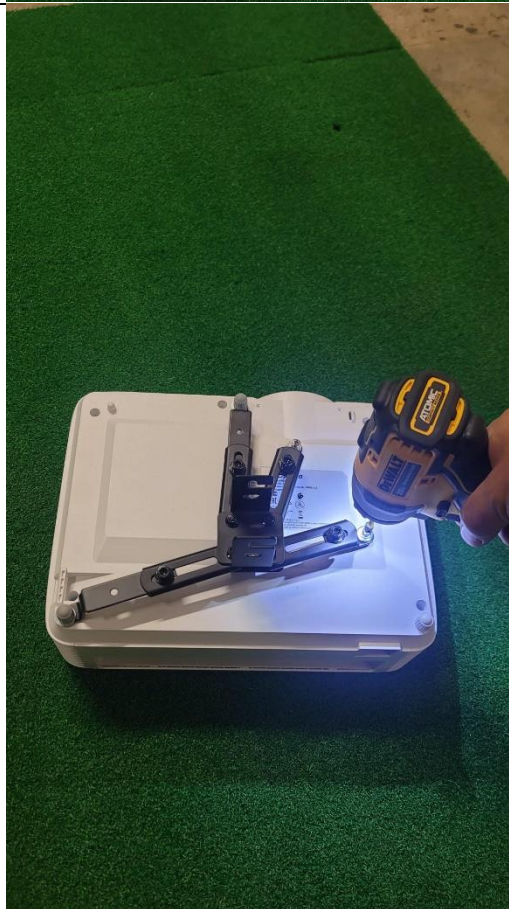

Your projector is now ready to hang on the mount.

Step 7:
Slide mount bracket over butterfly screws and tighten. Needs to be tightened tilting "up" at around 15 degrees to fill the screen. You may need to adjust it a few times.



When building the frame ensure that the double cross over ring is mounted and tightened (using hex screw) to the cross bar.



You can insert the desired length of poles (2 to 3 maximum) after they are clipped together to hold the projector.



The final outcome will look like this.

