



LIFTING SLINGS & RECOVERY STRAPS

LIFTING YOUR BUSINESS TO A HIGHER LEVEL


AUSTRALIAN LIFTING CENTRE PTY LTD

1300 100 120

www.austlift.com.au

Lifting Slings & Recovery Straps

Flat Webbing Sling	174
Polyester Round Sling	175
Recovery Tow Strap	177
Grade 80 Chain Sling WLL	178
Grade 100 Chain Sling WLL	178
Grade 80 Chain Sling, 1 Leg	179
Grade 80 Chain Sling, 2 Legs	181
Grade 80 Chain Sling, 4 Legs	183
Grade 100 Chain Sling, 1 Leg	185
Grade 100 Chain Sling, 2 Legs	187
Grade 100 Chain Sling, 4 Legs	189
Correct Selection Of Sling	191
Round Sling & Flat Webbing Sling WLL	191
Wire Rope Sling WLL	192

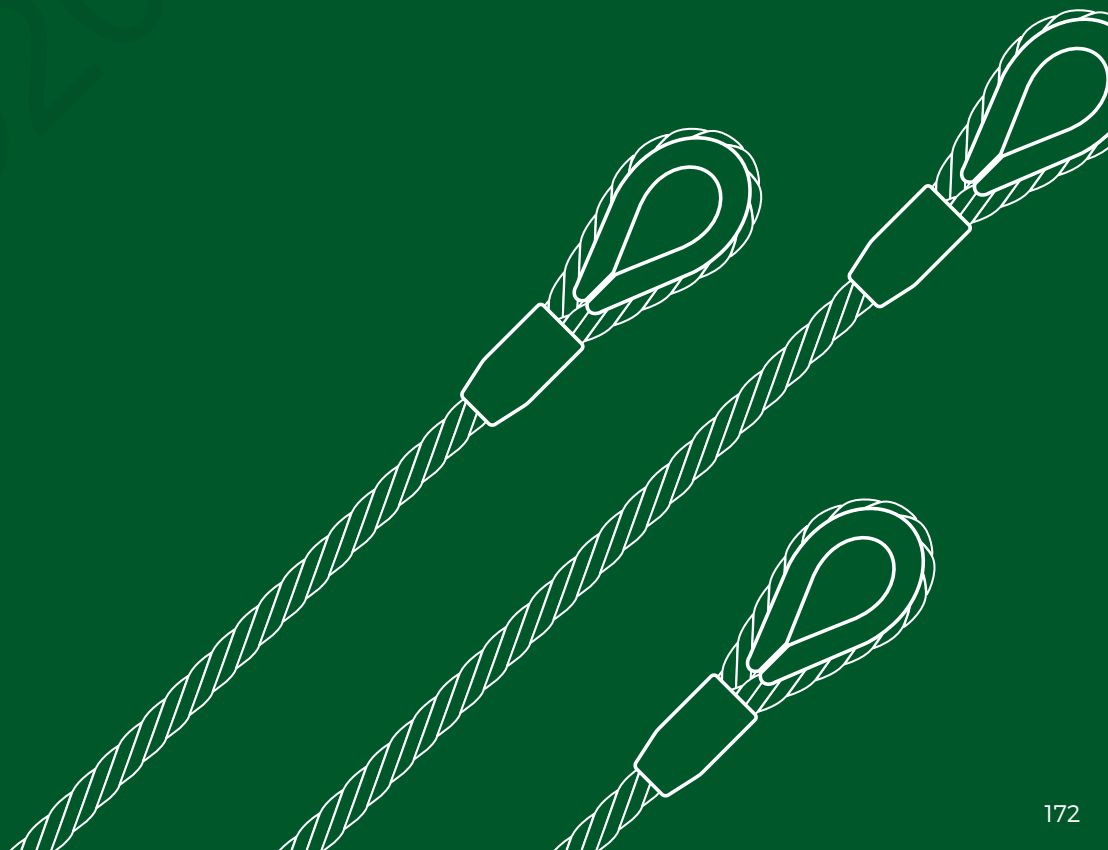

CHAIN SLING & WEBBING SLING TYPES




1 Leg Wire Sling
Thimble Eyes




1 Leg Chain Sling
Grab & Sling hook




1 Leg Chain Sling
Grab & Self lock hook




1 Leg Web Sling
Sling hook




1 Leg Round Sling
Sling hook

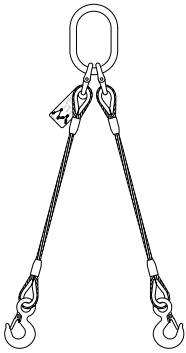


2 Leg Wire Sling
Thimble Eyes & Hoist Hook




2 Leg Chain Sling
Grab & Sling hook




2 Leg Chain Sling
Grab & Self lock hook

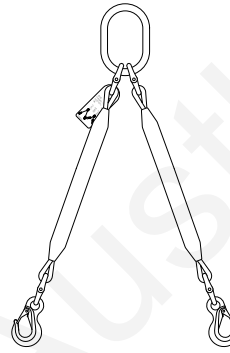


2 Leg Web Sling
Sling hook

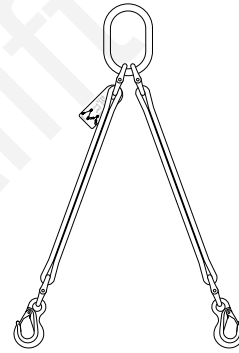


2 Leg Round Sling
Sling hook

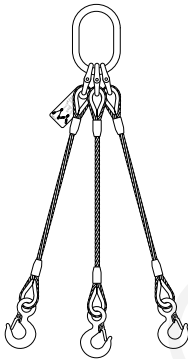


3 Leg Wire Sling
Thimble Eyes & Hoist Hook




3 Leg Chain Sling
Grab & Sling hook




3 Leg Chain Sling
Grab & Self lock hook

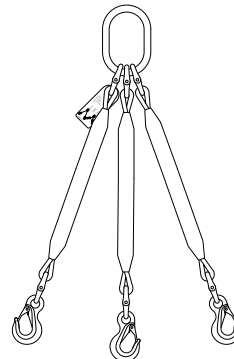


3 Leg Web Sling
Sling hook

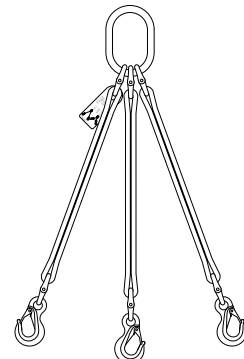


3 Leg Round Sling
Sling hook

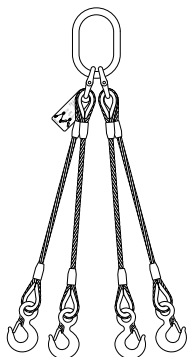


4 Leg Wire Sling
Thimble Eyes & Hoist Hook

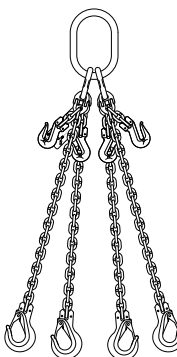


4 Leg Chain Sling
Grab & Sling hook

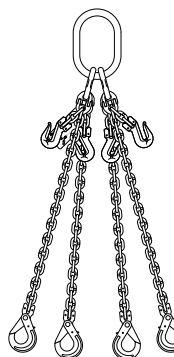

4 Leg Chain Sling
Grab & Self lock hook

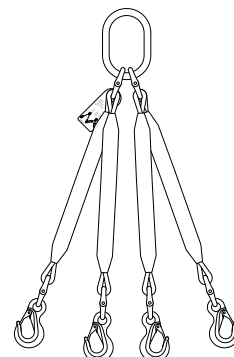

4 Leg Web Sling
Sling hook

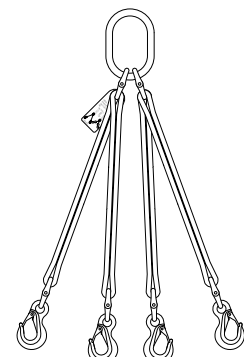

4 Leg Round Sling
Sling hook

Flat Webbing Slings

Austlift flat webbing slings are manufactured to the specifications of Austlift and according to Australian Standard AS1353.1. Fabricated using 100% high tenacity polyester yarn. Durable and specially woven, 100% polyester with standard folded eyes that incorporates eye wear padding to provide maximum protection around the eyes. Each sling is proof tested, individually serial numbered, tagged and complete with test certificates.

- Other sizes available upon request.
- Spec sheet available on the website.



WLL 600KG		
WHITE WIDTH: 35mm		
CODE	LENGTH (M)	Wt. (kg)
910051	1.1M	0.1

WLL 1000KG		
VIOLET WIDTH: 50mm		
CODE	LENGTH (M)	Wt. (kg)
910105	0.5	0.25
910110	1.0	0.45
910115	1.5	0.6
910120	2.0	0.72
910125	2.5	0.85
910130	3.0	0.98
910135	3.5	0.94
910140	4.0	1.25
910145	4.5	1.49
910150	5.0	1.50
910155	5.5	1.6
910160	6.0	1.72
910170	7.0	1.96
910180	8.0	2.2
910190	9.0	2.44
910191	10.0	2.68

WLL 5000KG		
RED WIDTH: 150mm		
CODE	LENGTH (M)	Wt. (kg)
910515	1.5	1.74
910520	2.0	2.3
910530	3.0	3.5
910540	4.0	4.5
910550	5.0	6
910560	6.0	19
910570	7.0	22.1
910580	8.0	25.3
910590	9.0	28.49
910591	10.0	31.6

WLL 2000KG		
GREEN WIDTH: 60mm		
CODE	LENGTH (M)	Wt. (kg)
910205	0.5	0.3
910210	1.0	0.62
910215	1.5	0.84
910220	2.0	1.06
910225	2.5	1.25
910230	3.0	1.4
910235	3.5	1.62
910240	4.0	1.86
910245	4.5	2.3
910250	5.0	2.16
910255	5.5	2.38
910260	6.0	2.6
910270	7.0	3.05
910280	8.0	3
910290	9.0	3.8
910291	10.0	4.2

WLL 6000KG		
BROWN WIDTH: 180mm		
CODE	LENGTH (M)	Wt. (kg)
910615	1.5	2.18
910620	2.0	2.95
910630	3.0	4.4
910640	4.0	5.3
910650	5.0	6.2
910660	6.0	7.4
910670	7.0	8.63
910680	8.0	9.86
910690	9.0	11
910691	10.0	12.5
910692	12.0	15

WLL 3000KG		
YELLOW WIDTH: 90mm		
CODE	LENGTH (M)	Wt. (kg)
910310	1.0	0.9
910315	1.5	1.25
910320	2.0	1.5
910325	2.5	1.8
910330	3.0	2.32
910335	3.5	2.49
910340	4.0	2.7
910345	4.5	2.8
910350	5.0	3.15
910355	5.5	3.4
910360	6.0	3.85
910365	6.5	4.17
910370	7.0	4.49
910380	8.0	5.14
910391	10.0	6.42

WLL 8000KG		
BLUE WIDTH: 240mm		
CODE	LENGTH (M)	Wt. (kg)
910815	1.5	3.49
910820	2.0	4.6
910830	3.0	7
910840	4.0	8.6
910850	5.0	10.75
910860	6.0	12.9
910870	7.0	15.05
910880	8.0	17.1
910890	9.0	19.35
910891	10.0	21.5

WLL 15,000KG		
ORANGE WIDTH: 240mm		
CODE	LENGTH (M)	Wt. (kg)
911560	6	23.44

WLL 4000KG		
GREY WIDTH: 120mm		
CODE	LENGTH (M)	Wt. (kg)
910410	1.0	1.35
910415	1.5	2.02
910420	2.0	2.7
910425	2.5	3.37
910430	3.0	3.49
910435	3.5	3.6
910440	4.0	3.58
910450	5.0	4.58
910460	6.0	5.5
910470	7.0	6.41
910480	8.0	6.1
910491	10.0	9.1

WLL 10,000KG		
ORANGE WIDTH: 300mm		
CODE	LENGTH (M)	Wt. (kg)
911030	3	7.5
911040	4	9.3
911050	5	11.6
911060	6	14
911080	8	18.5
911100	10	22.6

WLL 20,000KG		
ORANGE WIDTH: 300mm		
CODE	LENGTH (M)	Wt. (kg)
912020	2.0	9
912060	6.0	25.52
912080	8.0	33.08
912100	10.0	56
912150	15.0	62



Polyester Round Slings

Every Austlift sling is proof tested, individually serial numbered, tagged and comes with a test certificate. Fabricated using 100% high tenacity polyester yarn and wound in a continuous hank to form an endless sling. Durable and specially woven, 100% polyester non-load bearing tubular sleeve to give maximum wear protection to the yarn hank. Conforms to Australian Standard AS 4497.1.

- Black colour available upon request.
- Spec sheet available on the website.



WLL 1000KG

VIOLET WIDTH: 45mm		
CODE	LENGTH(M)	Wt. (kg)
900105(B)	0.5	0.19
900107	0.75	0.27
900110(B)	1.0	0.33
900115(B)	1.5	0.46
900120(B)	2.0	0.58
900125	2.5	0.75
900130	3.0	0.88
900135	3.5	1.05
900140	4.0	1.17
900150	5.0	1.4
900160	6.0	1.73
900180	8.0	1.98
900191	10.0	2.4

WLL 2000KG

GREEN WIDTH: 50mm		
CODE	LENGTH(M)	Wt. (kg)
900205(B)	0.5	0.27
900207	0.7	0.26
900210(B)	1.0	0.47
900215(B)	1.5	0.75
900220(B)	2.0	0.97
900225(B)	2.5	1.11
900230(B)	3.0	1.21
900235	3.5	1.38
900240(B)	4.0	1.55
900245	4.5	1.72
900250	5.0	2.18
900260(B)	6.0	2.58
900270	7.0	2.98
900280	8.0	3.96
900291	10.0	4.3

WLL 3000KG

YELLOW WIDTH: 60mm		
CODE	LENGTH(M)	Wt. (kg)
900305	0.5	0.38
900310	1.0	0.62
900315	1.5	0.94
900320	2.0	1.22
900325	2.5	1.57
900330	3.0	1.83
900335	3.5	2.21
900340	4.0	2.48
900345	4.5	2.85
900350	5.0	3.02
900355	5.5	3.49
900360	6.0	3.71
900380	8.0	4.92
900391	10.0	6.2

WLL 4000KG

GREY WIDTH: 70mm		
CODE	LENGTH(M)	Wt. (kg)
900405	0.5	0.49
900410	1.0	0.88
900415	1.5	1.38
900420	2.0	1.88
900425	2.5	2.06
900430	3.0	2.68
900435	3.5	2.89
900440	4.0	3.25
900445	4.5	3.65
900450	5.0	4.14
900455	5.5	4.54
900460	6.0	4.9
900480	8.0	5.3
900491	10.0	8.8

WLL 5000KG

RED WIDTH: 80mm		
CODE	LENGTH (M)	Wt. (kg)
900510	1.0	1.3
900515	1.5	1.89
900520	2.0	2.55
900525	2.5	3.17
900530	3.0	3.75
900535	3.5	4.4
900540	4.0	5
900545	4.5	5.51
900550	5.0	6.15
900555	5.5	6.79
900560	6.0	7.42
900580	8.0	9.394
900591	10.0	11

WLL 6000KG

BROWN WIDTH: 90mm		
CODE	LENGTH (M)	Wt. (kg)
900610	1.0	1.619
900615	1.5	2.1
900620	2.0	2.8
900625	2.5	3.5
900630	3.0	4.2
900635	3.5	4.84
900640	4.0	5.6
900645	4.5	6.23
900650	5.0	6.85
900655	5.5	7.66
900660	6.0	8.1
900680	8.0	10.8
900691	10.0	13.5

* Note: Codes with a (B) are also available in black.

WLL 8000KG

BLUE WIDTH: 100mm		
CODE	LENGTH (M)	Wt. (kg)
900810	1.0	1.7
900815	1.5	2.4
900820	2.0	3.1
900825	2.5	4.1
900830	3.0	5.5
900835	3.5	5.4
900840	4.0	6.14
900845	4.5	6.94
900850	5.0	7.58
900855	5.5	8.33
900860	6.0	9.1
900880	8.0	13
900891	10.0	15.16

WLL 10000KG

ORANGE WIDTH: 110mm		
CODE	LENGTH (M)	Wt. (kg)
901005	0.5	1.33
901010	1.0	2.2
901015	1.5	3.03
901020	2.0	3.3
901025	2.5	4.2
901030	3.0	5
901035	3.5	5.98
901040	4.0	7.98
901045	4.5	8.08
901050	5.0	10.51
901055	5.5	9.896
901060	6.0	11.98
901080	8.0	17
901100	10.0	19.87

WLL 12,000KG

ORANGE WIDTH: 125mm		
CODE	LENGTH (M)	Wt. (kg)
901230	3.0	7.5
901240	4.0	9.37
901250	5.0	12.3
901260	6.0	14.76
901280	8.0	16.03
901291	10.0	22.45
901292	12.0	28.5

WLL 15,000KG

ORANGE WIDTH: 125mm		
CODE	LENGTH (M)	Wt. (kg)
901520	2.0	6.75
901540	4.0	13.5
901560	6.0	19
901580	8.0	27
901591	10.0	34
901592	12.0	46

WLL 20,000KG

ORANGE WIDTH: 150mm		
CODE	LENGTH (M)	Wt. (kg)
902010	1.0	5
902015	1.5	7.8
902020	2.0	10.5
902025	2.5	11
902030	3.0	15
902040	4.0	23
902045	4.5	23.62
902050	5.0	26.25
902060	6.0	31.5
902080	8.0	42
902100	10.0	52.5
902120	12.0	63

WLL 25,000KG

ORANGE WIDTH: 180mm		
CODE	LENGTH (M)	Wt. (kg)
902510	1.0	6
902520	2.0	11.8
902530	3.0	18.4
902560	6.0	36.4
902591	10.0	59.8

WLL 30,000KG

ORANGE WIDTH: 200mm		
CODE	LENGTH (M)	Wt. (kg)
903025	2.5	25
903030	3.0	29
903035	3.5	33
903040	4.0	37.5
903045	4.5	41.9
903050	5.0	46.7
903060	6.0	63
903080	8.0	85
903100	10.0	93
903105	15.0	159

WLL 40,000KG

ORANGE WIDTH: 210mm		
CODE	LENGTH (M)	Wt. (kg)
904030	3.0	46.24
904035	3.5	53.95
904040	4.0	66
904050	5.0	77.08
904060	6.0	92.5

WLL 50,000KG

ORANGE WIDTH: 240mm		
CODE	LENGTH (M)	Wt. (kg)
905030	3.0	52.74
905040	4.0	70.3
905050	5.0	87.9
905060	6.0	105.5
905070	7.0	123.08
905080	8.0	140.7
905100	10.0	170






WLL 80,000KG

ORANGE WIDTH: 300mm		
CODE	LENGTH (M)	Wt. (kg)
908030	3.0	57.7

Correct Selection of Synthetic Flat and Round Sling

- There are a few things to consider when selecting the correct sling for intended lifting operation.
- How many slings are required to conduct the lift safely.
- Select which sling (flat or round) that will safely lift the load.
- Determine the load weight to be lifted taking into account of the angle of the lift.
- Select the correct lifting mode to do the lift, see chart above.
- Consider the correct length of sling to lift the load.
- Does the lift require other fittings eg: shackles lifting points etc.
- The object to be lifted has any sharp edges then protective sleeving should be considered.
- Consider the lifting environment such as hazardous chemicals and extreme temperature conditions that affect the safe use of the sling.
- If you require further assistance selecting the correct sling, contact our friendly staff at Austlift.

FLAT AND ROUND SLING WORKING LOAD LIMITS CHART (KG) - (WLLs)										
ROUND SLING										
FLAT WEBBING SLING										
	VERTICAL	CHOKE	BASKET	60°	90°	120°	60°	60° CHOKE	SINGLE WRAP Max 45°	DOUBLE WRAP Max 45°
WHITE	600	480	1200	1020	840	600	1020	840	-	-
VIOLET	1000	800	2000	1700	1400	1000	1700	1400	1,380	1,380
GREEN	2000	1600	4000	3400	2800	2000	3400	2800	2,760	2,760
YELLOW	3000	2400	6000	5100	4200	3000	5100	4200	4,140	4,140
GREY	4000	3200	8000	6800	5600	4000	6800	5600	5,520	5,520
RED	5000	4000	10000	8500	7000	5000	8500	7000	6,900	6,900
BROWN	6000	4800	12000	10200	8400	6000	10200	8400	8,280	8,280
BLUE	8000	6400	16000	13600	11200	8000	13600	11200	11,040	11,040
ORANGE	10000	8000	20000	17000	14000	10000	17000	14000	13,800	13,800
ORANGE	12000	9600	24000	20400	16800	12000	20400	16800	16,560	16,560
ORANGE	15000	12000	30000	25500	21000	15000	25500	21000	20,700	20,700
ORANGE	20000	16000	40000	34000	28000	20000	34000	28000	27,600	27,600
ORANGE	25000	20000	50000	42500	35000	25000	-	-	34,500	34,500
ORANGE	30000	24000	60000	51000	42000	30000	-	-	41,400	41,400
ORANGE	40000	32000	80000	69200	56400	40000	-	-	55,200	55,200
ORANGE	50000	40000	100000	86500	70500	50000	-	-	69,000	69,000
ORANGE	80000	64000	160000	138400	112800	80000	-	-	110,400	110,400

WIRE ROPE WORKING LOAD LIMITS CHART (t) - (WLLs)												
ROPE Ø (mm)												
	REEVE LOAD			ROUND BASKET LOAD			OBLONG BASKET LOAD			2,3 OR 4 LEG SLING		
	Straight	Round	Oblong	0°	60°	90°	0°	60°	90°	0° - 60°	90°	120°
8	0.55	0.41	0.27	1.09	0.94	0.77	0.55	0.48	0.39	0.94	0.77	0.55
9	0.69	0.52	0.34	1.38	1.19	0.97	0.69	0.60	0.49	1.19	0.97	0.69
10	0.85	0.64	0.43	1.70	1.47	1.20	0.85	0.74	0.61	1.47	1.20	0.85
11	1.03	0.77	0.52	2.10	1.78	1.45	1.03	0.90	0.73	1.78	1.45	1.03
12	1.23	0.92	0.61	2.50	2.10	1.73	1.23	1.07	0.87	2.10	1.73	1.23
13	1.44	1.08	0.72	2.90	2.50	2.00	1.44	1.25	1.02	2.50	2.00	1.44
14	1.67	1.25	0.83	3.30	2.90	2.40	1.67	1.45	1.19	2.90	2.40	1.67
16	2.20	1.64	1.09	4.40	3.80	3.10	2.20	1.90	1.55	3.80	3.10	2.20
18	2.80	2.10	1.38	5.50	4.80	3.90	2.80	2.40	1.87	4.80	3.90	2.80
20	3.40	2.60	1.70	6.80	5.90	4.80	3.40	3.00	2.40	5.90	4.80	3.40
22	4.10	3.10	2.10	8.30	7.10	5.80	4.10	3.60	2.90	7.10	5.80	4.10
24	4.90	3.70	2.50	9.80	8.50	6.90	4.90	4.30	3.50	8.50	6.90	4.90
26	5.80	4.30	2.90	11.5	10.0	8.10	5.80	5.00	4.10	10.0	8.10	5.80
28	6.70	5.00	3.30	13.4	11.6	9.40	6.70	5.80	4.70	11.6	9.40	6.70
32	8.70	6.50	4.40	17.4	15.1	12.3	8.70	7.60	6.20	15.1	12.3	8.70

NOTES FOR WIRE ROPE SLING LIFT MODE CHART

- The working load limit values include a reduction factor of 0.95 this applies only to slings with machine spliced eyes.
- Based on a safety factor of 5 to 1, the table applies to slings used for general purpose lifting applications.
- The sling shall be derated when the sling is subject to unusual dynamic loading.
- The load factors and values are based on single part sling leg.
- The working load limit values may be increased by 50% for double-part sling legs.
- Ensure that wire rope slings are adequately protected from contact with sharp edges.
- Ferrules on the wire rope sling shouldn't be bent around edges or sharp corners during loading.
- For slings with other types of termination, the relevant factor for terminations shall be used.

NOTES FOR 2, 3 AND 4 LEG MODE CHART

- Where an endless slings or soft eye of a sling interfaces with a fitting the supporting surface of the fitting shall have a diameter not less than the rope diameter. Where the diameter of such a fitting is less than two rope diameters the Sling shall be derated by 50%.
- This method of rating general-purpose multi-leg slings follows the principle that loads could be supported by only two legs, the other legs only balancing the load. It makes allowance for adverse conditions, such as unequal leg lengths, an uneven load shape, a rigid load and an off-centred centre of gravity.
- The WLL for a multi-leg sling having an included angle of 60 degrees between the legs is the maximum WLL for the sling, even when the included angle between the legs is less than 60 degrees. Under no circumstances should the included angle between the legs of a multi-leg Sling be allowed to exceed 120 degrees. The WLL of lifting components and end fittings of a multi-leg sling should be considered when determining the maximum WLL of the Sling.

RECOVERY TOW STRAPS

Nylon (Black Snake)

APPLICATION

8 Tonne – 30 Tonne Break Strength

Recreational 4WD & light commercial vehicles use the high elasticity (20%) & robust construction for recovery & towing use.

50 Tonne –150 Tonne Break Strength

Heavy commercial, industrial, military vehicles use the high strength, light weight, elasticity (20%) & robust construction for recovery & towing use.



FEATURES

- Abrasion & cut resistant rubber.
- Highstrength nylon 6.6 load bearing core.
- Individual serial number for traceability.
- Smooth stretch (20%) assists recovery.
- Safety in handling is a key feature & cleaning is not required after use.
- Very flexible & light for access into awkward spaces & for attachment devices.
- Easy to install with oval shaped eyelets sized to fit standard connections.
- Oil, water, mud, & dust proof.
- Far superior durability compared to fabric snatch-straps.

Kevlar (Black Snake)

APPLICATION

Heavy commercial, industrial, military, & mining vehicles use the ultra high strength to weight ratio & robust construction for recovery & towing use.

FEATURES

- Abrasion & cut resistant rubber with a minimum 10mm thickness.
- Very high strength kevlar fibre load bearing core.
- Ultra high strength to weight ratio.
- Individual serial number for traceability.
- Low & uniform elasticity (4%).
- Safety in handling is a key feature & cleaning.
- Very flexible & light for access into awkward spaces & for attachment devices.
- Easy to install with steel eyelets sized to fit standard shackle/pin connections.
- Superior durability compared to fabric snatch straps.
- Oil, water, mud & dust proof.
- Industrial grade machined steel inserts in eyelets.
- Machined holes in eyelets to accept standard shackle pins.
- Special eyelet configurations available on request.
- Other sizes & configurations available.

HOW TO DETERMINE THE MAXIMUM RECOMMENDED WEIGHT - BOGGED VEHICLE

STROP SIZE BREAKING STRENGTH	BOGGED VEHICLES GROSS VEHICLE WEIGHT (G.V.W) OF RECOVERED OR TOWED MACHINE GIVEN IN TONNES		
50	100	50	35
70	140	70	50
100	200	100	70
150	300	150	100
200	400	200	140
300	600	300	200

1. Break strength is the applied load at which the recovery strop fails
2. Maximum GVW is the maximum recommended gross vehicle weight of a severely bogged vehicle for a given tow strop
3. Severely bogged vehicle is judged as a vehicle which is resting on its axles or chassis. The vehicle is being dragged with no rolling of the wheels.

We will manufacture to suit your requirements. (2-4 weeks lead time)

Assembled Grade 80 & Grade 100 Chain Sling

- Complies to AS 3775.1-2014.
- Proof tested with test certificate & stainless steel WLL safety tag.
- Plastic bucket & lid provided with sling kits.
- Other sizes & capacities available.
- Spec sheet available on the website.



WORKING LOAD LIMITS CHART (t) - GRADE 80 (T)									
Chain	Single leg slings				Slings of 2, 3 or 4 legs			2 leg slings	
Chain size (mm)	Straight sling	Adjustable sling	Reeved sling	Basket sling Max 60°	Straight sling			Reeved sling Max 60°	Basket sling Max 60°
					60°	90°	120°		
6	1.1	1.1	0.8	1.5	1.9	1.6	1.1	1.5	2.5
7	1.5	1.5	1.1	2	2.6	2.1	1.5	2	3.4
8	2.0	2.0	1.5	2.6	3.5	2.8	2.0	2.6	4.5
10	3.2	3.2	2.4	4.1	5.5	4.5	3.2	4.1	7.2
13	5.3	5.3	4.0	6.9	9.2	7.5	5.3	6.9	11.9
16	8.0	8.0	6.0	10.4	13.8	11.3	8.0	10.4	18.0
20	12.5	12.5	9.4	16.3	21.6	17.6	12.5	16.3	28.1
22	15.0	15.0	11.3	19.5	26.0	21.2	15.0	19.5	33.8
26	21.2	21.2	15.9	27.6	36.7	29.9	21.2	27.6	47.7
32	31.5	31.5	23.6	41	54.5	44.4	31.5	41.0	70.9


WORKING LOAD LIMITS CHART (t) - GRADE 100 (V)									
Chain	Single leg slings				Slings of 2, 3 or 4 legs			2 leg slings	
Chain size (mm)	Straight sling	Adjustable sling	Reeved sling	Basket sling Max 60°	Straight sling			Reeved sling Max 60°	Basket sling Max 60°
					60°	90°	120°		
6	1.4	1.4	1.1	1.8	2.4	2.0	1.4	1.8	3.2
8	2.5	2.5	1.9	3.3	4.3	3.5	2.5	3.3	5.6
10	4.0	4.0	3.0	5.2	6.9	5.6	4.0	5.2	9.0
13	6.7	6.7	5.0	8.7	11.6	9.4	6.7	8.7	15.1
16	10.0	10.0	7.5	13.0	17.3	14.1	10.0	13.0	22.5
20	16.0	16.0	12.0	20.8	27.7	22.6	16.0	20.8	36.0
22	19.0	19.0	14.3	24.7	32.9	26.8	19.0	24.7	42.8

HINTS ON ORDERING CHAIN SLING

1. How many legs you require for the chain sling?
2. What size of chain you require or if not sure what is the maximum load to be lifted?
3. How long is the effective length you want for each leg?
4. Do you require shorteners (grab hooks) on top of the sling?
5. What end fitting (hooks) do you require on the end of the sling ?

ASSEMBLED GRADE 80 CHAIN SLINGS

G80 Single (1) Leg Chain Sling (Clevis Grab Hook & Clevis Sling Hook)

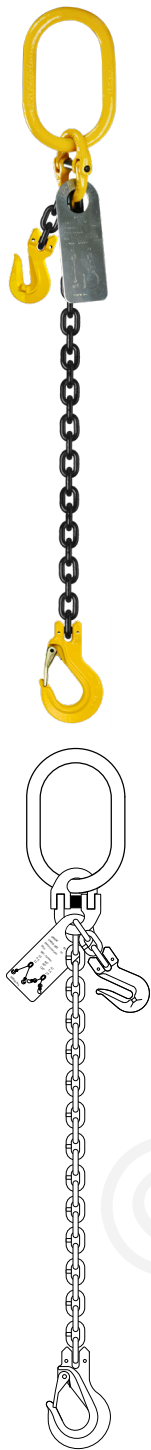

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD	SHORTENING HOOK	END FITTING
6mm	920611	1M	1.68	1.1T	GC-6-8	SC-6-8
	920612	2M	2.52	1.1T	GC-6-8	SC-6-8
	920613	3M	3.36	1.1T	GC-6-8	SC-6-8
	920614	4M	4.2	1.1T	GC-6-8	SC-6-8
	920615	5M	5.04	1.1T	GC-6-8	SC-6-8
	920616	6M	5.88	1.1T	GC-6-8	SC-6-8
7mm	920711	1M	2.4	1.5T	GC-7/8-8	SC-7/8-8
	920712	2M	3.54	1.5T	GC-7/8-8	SC-7/8-8
	920713	3M	4.68	1.5T	GC-7/8-8	SC-7/8-8
	920714	4M	5.82	1.5T	GC-7/8-8	SC-7/8-8
	920715	5M	6.97	1.5T	GC-7/8-8	SC-7/8-8
	920716	6M	8.11	1.5T	GC-7/8-8	SC-7/8-8
8mm	920811	1M	2.59	2.0T	GC-7/8-8	SC-7/8-8
	920812	2M	4.01	2.0T	GC-7/8-8	SC-7/8-8
	920813	3M	5.42	2.0T	GC-7/8-8	SC-7/8-8
	920814	4M	6.83	2.0T	GC-7/8-8	SC-7/8-8
	920815	5M	8.24	2.0T	GC-7/8-8	SC-7/8-8
	920816	6M	9.66	2.0T	GC-7/8-8	SC-7/8-8
10mm	921011	1M	4.28	3.2T	GC-10-8	SC-10-8
	921012	2M	6.49	3.2T	GC-10-8	SC-10-8
	921013	3M	8.76	3.2T	GC-10-8	SC-10-8
	921014	4M	10.91	3.2T	GC-10-8	SC-10-8
	921015	5M	13.11	3.2T	GC-10-8	SC-10-8
	921016	6M	16.32	3.2T	GC-10-8	SC-10-8
13mm	921311	1M	7.52	5.3T	GC-13-8	SC-13-8
	921312	2M	11.28	5.3T	GC-13-8	SC-13-8
	921313	3M	15.04	5.3T	GC-13-8	SC-13-8
	921314	4M	18.80	5.3T	GC-13-8	SC-13-8
	921315	5M	22.56	5.3T	GC-13-8	SC-13-8
	921316	6M	26.32	5.3T	GC-13-8	SC-13-8
16mm	921612	2M	18.62	8.0T	GC-16-8	SC-16-8
	921613	3M	24.54	8.0T	GC-16-8	SC-16-8
	921614	4M	30.18	8.0T	GC-16-8	SC-16-8



Test Certificate



WLL Safety tag




PVC container

G80 Single (1) Leg Chain Sling

(Clevis Grab Hook & Clevis Self Locking Hook)

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD	SHORTENING HOOK	END FITTING
6mm	930611	1M	1.84	1.1T	GC-6-8	LC6-8
	930612	2M	2.67	1.1T	GC-6-8	LC6-8
	930613	3M	3.51	1.1T	GC-6-8	LC6-8
	930614	4M	4.34	1.1T	GC-6-8	LC6-8
	930615	5M	5.18	1.1T	GC-6-8	LC6-8
	930616	6M	6.02	1.1T	GC-6-8	LC6-8
7mm	930711	1M	2.68	1.5T	GC-7/8-8	LC7/8-8
	930712	2M	3.82	1.5T	GC-7/8-8	LC7/8-8
	930713	3M	4.96	1.5T	GC-7/8-8	LC7/8-8
	930714	4M	6.1	1.5T	GC-7/8-8	LC7/8-8
	930715	5M	7.24	1.5T	GC-7/8-8	LC7/8-8
	930716	6M	8.38	1.5T	GC-7/8-8	LC7/8-8
8mm	930811	1M	2.87	2.0T	GC-7/8-8	LC7/8-8
	930812	2M	4.28	2.0T	GC-7/8-8	LC7/8-8
	930813	3M	5.69	2.0T	GC-7/8-8	LC7/8-8
	930814	4M	7.10	2.0T	GC-7/8-8	LC7/8-8
	930815	5M	8.51	2.0T	GC-7/8-8	LC7/8-8
	930816	6M	9.92	2.0T	GC-7/8-8	LC7/8-8
10mm	931011	1M	4.79	3.2T	GC-10-8	LC10-8
	931012	2M	6.99	3.2T	GC-10-8	LC10-8
	931013	3M	9.21	3.2T	GC-10-8	LC10-8
	931014	4M	11.42	3.2T	GC-10-8	LC10-8
	931015	5M	13.63	3.2T	GC-10-8	LC10-8
	931016	6M	15.84	3.2T	GC-10-8	LC10-8
13mm	931311	1M	8.38	5.3T	GC-13-8	LC13-8
	931312	2M	12.13	5.3T	GC-13-8	LC13-8
	931313	3M	16.14	5.3T	GC-13-8	LC13-8
	931314	4M	19.64	5.3T	GC-13-8	LC13-8
	931315	5M	23.39	5.3T	GC-13-8	LC13-8
	931316	6M	27.14	5.3T	GC-13-8	LC13-8
16mm	931612	2M	21.82	8.0T	GC-16-8	LC16-8
	931613	3M	27.46	8.0T	GC-16-8	LC16-8
	931614	4M	33.10	8.0T	GC-16-8	LC16-8

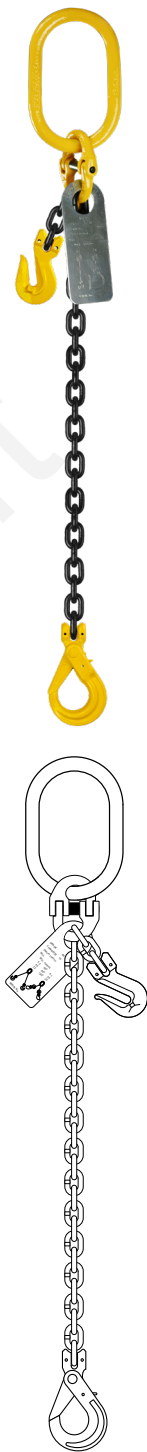

Test Certificate




WLL Safety tag



PVC container

G80 Double (2) Leg Chain Sling (Clevis Grab Hook & Clevis Sling Hook)

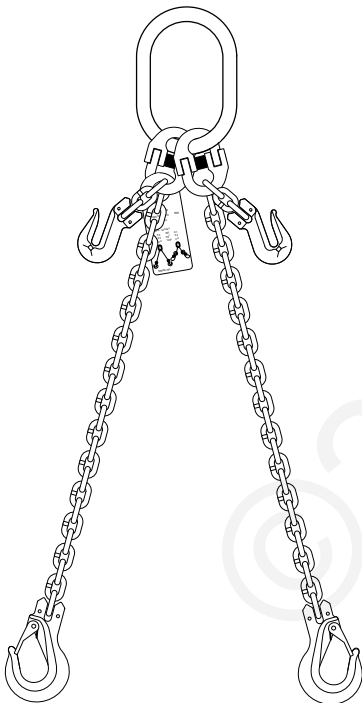

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD			SHORTENING HOOK	END FITTING
				60°	90°	120°		
6mm	940621	1M	3.12	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
	940622	2M	4.54	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
	940623	3M	6.48	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
	940624	4M	8.16	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
	940625	5M	9.84	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
	940626	6M	11.52	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
7mm	940721	1M	4.79	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
	940722	2M	6.9	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
	940723	3M	7.55	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
	940724	4M	9.23	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
	940725	5M	13.74	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
	940726	6M	16.02	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
8mm	940821	1M	5.00	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
	940822	2M	7.82	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
	940823	3M	10.64	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
	940824	4M	13.46	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
	940825	5M	16.28	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
	940826	6M	19.10	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
10mm	941021	1M	8.15	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
	941022	2M	12.57	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
	941023	3M	17.00	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
	941024	4M	21.41	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
	941025	5M	25.84	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
	941026	6M	30.25	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
13mm	941321	1M	14.59	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
	941322	2M	22.11	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
	941323	3M	29.63	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
	941324	4M	37.15	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
	941325	5M	44.67	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
	941326	6M	52.19	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
16mm	941622	2M	37.02	13.8T	11.3T	8.0T	GC-16-8	SC-16-8
	941623	3M	48.30	13.8T	11.3T	8.0T	GC-16-8	SC-16-8
	941624	4M	59.58	13.8T	11.3T	8.0T	GC-16-8	SC-16-8



Test Certificate



WLL Safety tag




PVC container

G80 Double (2) Leg Chain Sling

(Clevis Grab Hook & Clevis Self Locking Hook)

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD			SHORTENING HOOK	END FITTING
				60°	90°	120°		
6mm	950621	1M	3.47	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
	950622	2M	5.11	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
	950623	3M	6.79	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
	950624	4M	8.47	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
	950625	5M	10.19	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
	950626	6M	11.83	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
7mm	950721	1M	5.19	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
	950722	2M	7.47	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
	950723	3M	9.75	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
	950724	4M	10.03	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
	950725	5M	14.31	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
	950726	6M	16.59	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
8mm	950821	1M	5.56	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
	950822	2M	8.38	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
	950823	3M	aa.20	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
	950824	4M	14.02	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
	950825	5M	16.84	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
	950826	6M	19.63	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
10mm	951021	1M	9.16	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
	951022	2M	13.58	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
	951023	3M	18.00	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
	951024	4M	22.42	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
	951025	5M	26.84	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
	951026	6M	31.26	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
13mm	951321	1M	16.35	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
	951322	2M	23.87	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
	951323	3M	31.39	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
	951324	4M	38.91	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
	951325	5M	46.43	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
	951326	6M	53.95	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
16mm	951622	2M	40.90	13.8T	11.3T	8.0T	GC-16-8	LC-16-8
	951623	3M	52.18	13.8T	11.3T	8.0T	GC-16-8	LC-16-8
	951624	4M	63.46	13.8T	11.3T	8.0T	GC-16-8	LC-16-8

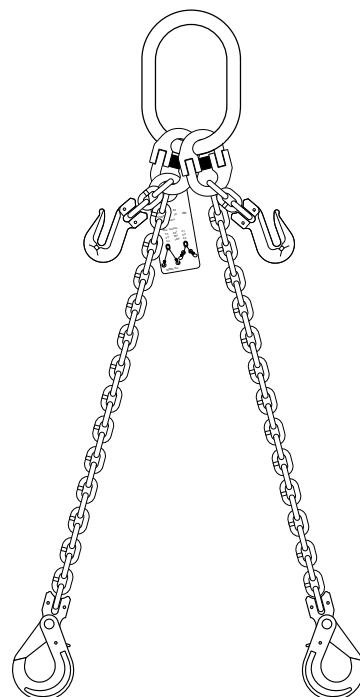

Test Certificate




WLL Safety tag



PVC container

G80 Quad (4) Leg Chain Sling

(Clevis Grab Hook & Clevis Sling Hook)

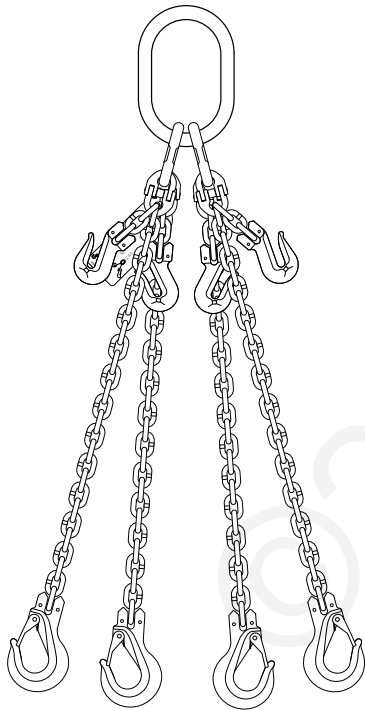

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD			SHORTENING HOOK	END FITTING
				60°	90°	120°		
6mm	960641	1M	5.98	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
	960642	2M	9.34	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
	960643	3M	12.7	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
	960644	4M	16.06	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
	960645	5M	19.42	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
	960646	6M	22.78	1.9T	1.6T	1.1T	GC-6-8	SC-6-8
7mm	960741	1M	9.09	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
	960742	2M	13.65	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
	960743	3M	18.21	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
	960744	4M	22.77	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
	960745	5M	27.33	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
	960746	6M	31.43	2.6T	2.1T	1.5T	GC-7/8-8	SC-7/8-8
8mm	960841	1M	9.73	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
	960842	2M	15.37	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
	960843	3M	21.01	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
	960844	4M	26.65	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
	960845	5M	32.29	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
	960846	6M	37.36	3.5T	2.8T	2.0T	GC-7/8-8	SC-7/8-8
10mm	961041	1M	11.87	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
	961042	2M	25.64	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
	961043	3M	33.27	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
	961044	4M	41.43	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
	961045	5M	50.16	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
	961046	6M	59.00	5.5T	4.5T	3.2T	GC-10-8	SC-10-8
13mm	961341	1M	25.91	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
	961342	2M	40.95	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
	961343	3M	55.99	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
	961344	4M	71.03	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
	961345	5M	86.07	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
	961346	6M	101.11	9.2T	7.5T	5.3T	GC-13-8	SC-13-8
16mm	961642	2M	67.64	13.8T	11.3T	8.0T	GC-16-8	SC-16-8
	961643	3M	90.20	13.8T	11.3T	8.0T	GC-16-8	SC-16-8
	961644	4M	112.76	13.8T	11.3T	8.0T	GC-16-8	SC-16-8



Test Certificate



WLL Safety tag




PVC container

G80 Quad (4) Leg Chain Sling

(Clevis Grab Hook & Clevis Self Locking Hook)

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD			SHORTENING HOOK	END FITTING
				60°	90°	120°		
6mm	970641	1M	6.52	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
	970642	2M	9.88	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
	970643	3M	13.24	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
	970644	4M	16.60	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
	970645	5M	19.96	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
	970646	6M	23.32	1.9T	1.6T	1.1T	GC-6-8	LC-6-8
7mm	970741	1M	10.26	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
	970742	2M	14.82	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
	970743	3M	19.38	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
	970744	4M	23.94	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
	970745	5M	28.50	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
	970746	6M	33.06	2.6T	2.1T	1.5T	GC-7/8-8	LC-7/8-8
8mm	970841	1M	10.87	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
	970842	2M	16.51	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
	970843	3M	22.14	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
	970844	4M	27.79	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
	970845	5M	33.43	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
	970846	6M	39.07	3.5T	2.8T	2.0T	GC-7/8-8	LC-7/8-8
10mm	971041	1M	16.81	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
	971042	2M	25.65	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
	971043	3M	35.41	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
	971044	4M	43.33	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
	971045	5M	52.17	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
	971046	6M	61.01	5.5T	4.5T	3.2T	GC-10-8	LC-10-8
13mm	971341	1M	29.46	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
	971342	2M	44.50	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
	971343	3M	59.54	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
	971344	4M	74.58	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
	971345	5M	89.62	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
	971346	6M	104.66	9.2T	7.5T	5.3T	GC-13-8	LC-13-8
16mm	971642	2M	75.40	13.8T	11.3T	8.0T	GC-16-8	LC-16-8
	971643	3M	97.96	13.8T	11.3T	8.0T	GC-16-8	LC-16-8
	971644	4M	120.52	13.8T	11.3T	8.0T	GC-16-8	LC-16-8

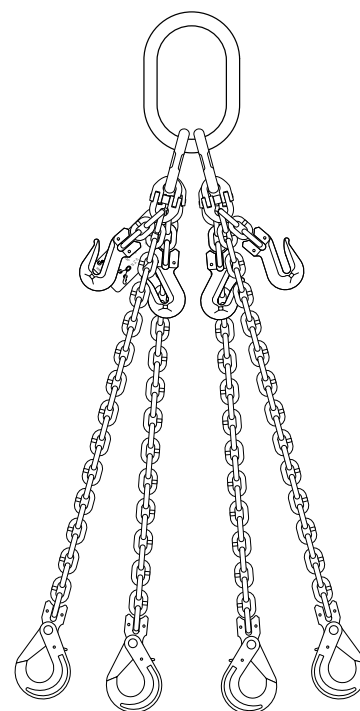

Test Certificate




WLL Safety tag



PVC container

ASSEMBLED GRADE 100 CHAIN SLINGS

G100 Single (1) Leg Chain Sling (Clevis Grab Hook & Clevis Sling Hook)

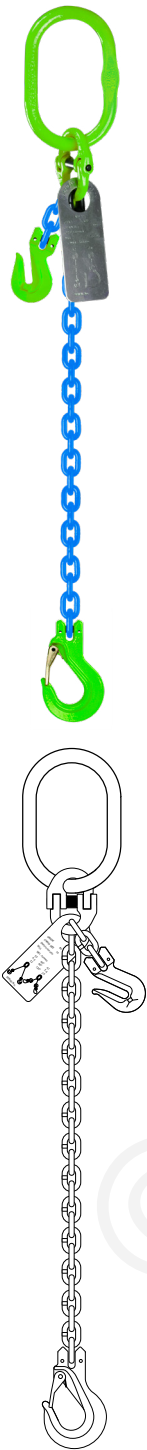

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD	SHORTENING HOOK	END FITTING
6mm	922611	1M	1.8	1.4T	GC-6-8	SC-6-8
	922612	2M	2.5	1.4T	GC-6-8	SC-6-8
	922613	3M	3.4	1.4T	GC-6-8	SC-6-8
	922614	4M	4.2	1.4T	GC-6-8	SC-6-8
	922615	5M	5.0	1.4T	GC-6-8	SC-6-8
	922616	6M	5.8	1.4T	GC-6-8	SC-6-8
8mm	922811	1M	2.95	2.5T	GC-7/8-8	SC-7/8-8
	922812	2M	4.4	2.5T	GC-7/8-8	SC-7/8-8
	922813	3M	5.8	2.5T	GC-7/8-8	SC-7/8-8
	922814	4M	7.2	2.5T	GC-7/8-8	SC-7/8-8
	922815	5M	8.6	2.5T	GC-7/8-8	SC-7/8-8
	922816	6M	10	2.5T	GC-7/8-8	SC-7/8-8
10mm	923011	1M	5.5	4.0T	GC-10-8	SC-10-8
	923012	2M	7.5	4.0T	GC-10-8	SC-10-8
	923013	3M	9.7	4.0T	GC-10-8	SC-10-8
	923014	4M	12	4.0T	GC-10-8	SC-10-8
	923015	5M	14	4.0T	GC-10-8	SC-10-8
	923016	6M	16.5	4.0T	GC-10-8	SC-10-8
13mm	923311	1M	9.41	6.7T	GC-13-8	SC-13-8
	923312	2M	13.5	6.7T	GC-13-8	SC-13-8
	923313	3M	16.9	6.7T	GC-13-8	SC-13-8
	923314	4M	20.6	6.7T	GC-13-8	SC-13-8
	923315	5M	24.5	6.7T	GC-13-8	SC-13-8
	923316	6M	28	6.7T	GC-13-8	SC-13-8
16mm	923612	2M	21.5	10.0T	GC-16-8	SC-16-8
	923613	3M	27.5	10.0T	GC-16-8	SC-16-8
	923614	4M	32.5	10.0T	GC-16-8	SC-16-8



Test Certificate



WLL Safety tag



PVC container

G100 Single (1) Leg Chain Sling (Clevis Grab Hook & Clevis Self Locking Hook)

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD	SHORTENING HOOK	END FITTING
6mm	932611	1M	1.86	1.4T	GC-6-8	LC-6-8
	932612	2M	2.67	1.4T	GC-6-8	LC-6-8
	932613	3M	3.47	1.4T	GC-6-8	LC-6-8
	932614	4M	4.27	1.4T	GC-6-8	LC-6-8
	932615	5M	5.07	1.4T	GC-6-8	LC-6-8
	932616	6M	5.87	1.4T	GC-6-8	LC-6-8
8mm	932811	1M	3.25	2.5T	GC-7/8-8	LC-7/8-8
	932812	2M	4.7	2.5T	GC-7/8-8	LC-7/8-8
	932813	3M	6.1	2.5T	GC-7/8-8	LC-7/8-8
	932814	4M	7.5	2.5T	GC-7/8-8	LC-7/8-8
	932815	5M	8.9	2.5T	GC-7/8-8	LC-7/8-8
	932816	6M	9.3	2.5T	GC-7/8-8	LC-7/8-8
10mm	933011	1M	6.0	4.0T	GC-10-8	LC-10-8
	933012	2M	8.0	4.0T	GC-10-8	LC-10-8
	933013	3M	9.0	4.0T	GC-10-8	LC-10-8
	933014	4M	12.5	4.0T	GC-10-8	LC-10-8
	933015	5M	14.5	4.0T	GC-10-8	LC-10-8
	933016	6M	17	4.0T	GC-10-8	LC-10-8
13mm	933311	1M	10.2	6.7T	GC-13-8	LC-13-8
	933312	2M	14.5	6.7T	GC-13-8	LC-13-8
	933313	3M	17.9	6.7T	GC-13-8	LC-13-8
	933314	4M	21.6	6.7T	GC-13-8	LC-13-8
	933315	5M	25.5	6.7T	GC-13-8	LC-13-8
	933316	6M	29.0	6.7T	GC-13-8	LC-13-8
16mm	933612	2M	23.0	10.0T	GC-16-8	LC-16-8
	933613	3M	29.0	10.0T	GC-16-8	LC-16-8
	933614	4M	34.0	10.0T	GC-16-8	LC-16-8




Test Certificate




WLL Safety tag



PVC container

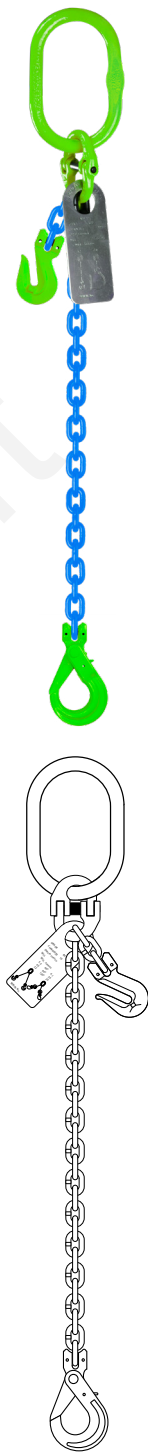

G100 Double (2) Leg Chain Sling (Clevius Grab Hook & Clevius Sling Hook)

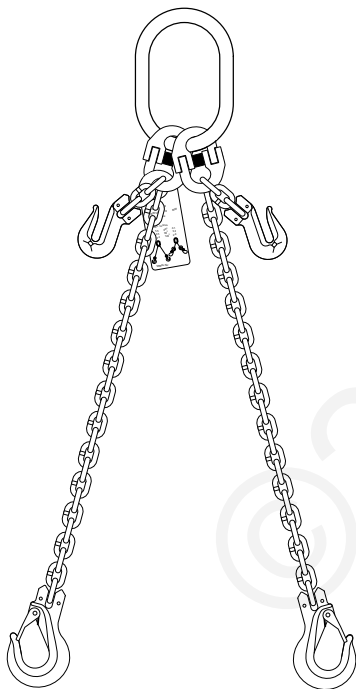

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD			SHORTENING HOOK	END FITTING
				60°	90°	120°		
6mm	942621	1M	3.5	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
	942622	2M	4.9	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
	942623	3M	6.5	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
	942624	4M	8.0	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
	942625	5M	9.7	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
	942626	6M	11.3	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
8mm	942821	1M	5.9	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
	942822	2M	8.24	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
	942823	3M	11.5	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
	942824	4M	14.3	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
	942825	5M	17.2	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
	942826	6M	19.9	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
10mm	943021	1M	10.5	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
	943022	2M	14.6	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
	943023	3M	19.0	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
	943024	4M	23.5	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
	943025	5M	27.8	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
	943026	6M	32.5	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
13mm	943321	1M	18.7	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
	943322	2M	26.5	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
	943323	3M	34.0	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
	943324	4M	41.0	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
	943325	5M	48.5	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
	943326	6M	56.0	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
16mm	943622	2M	43.5	17.3T	14.1T	10.0T	GC-16-8	SC-16-8
	943623	3M	54.5	17.3T	14.1T	10.0T	GC-16-8	SC-16-8
	943624	4M	65.5	17.3T	14.1T	10.0T	GC-16-8	SC-16-8



Test Certificate



WLL Safety tag



PVC container

G100 Double (2) Leg Chain Sling (Clevis Grab Hook & Clevis Self Locking Hook)

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD			SHORTENING HOOK	END FITTING
				60°	90°	120°		
6mm	952621	1M	6.0	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
	952622	2M	6.8	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
	952623	3M	8.5	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
	952624	4M	10.0	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
	952625	5M	11.5	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
	952626	6M	13.5	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
8mm	952821	1M	6.5	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
	952822	2M	8.6	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
	952823	3M	11.85	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
	952824	4M	15.0	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
	952825	5M	18.0	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
	952826	6M	21.0	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
10mm	953021	1M	11.5	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
	953022	2M	15.8	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
	953023	3M	20.0	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
	953024	4M	24.5	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
	953025	5M	29.0	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
	953026	6M	33.5	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
13mm	953321	1M	20.0	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
	953322	2M	27.5	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
	953323	3M	35.0	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
	953324	4M	42.5	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
	953325	5M	50.0	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
	953326	6M	57.0	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
16mm	953622	2M	45.0	17.3T	14.1T	10.0T	GC-16-8	LC-16-8
	953623	3M	56.0	17.3T	14.1T	10.0T	GC-16-8	LC-16-8
	953624	4M	67.0	17.3T	14.1T	10.0T	GC-16-8	LC-16-8




Test Certificate



WLL Safety tag





PVC container

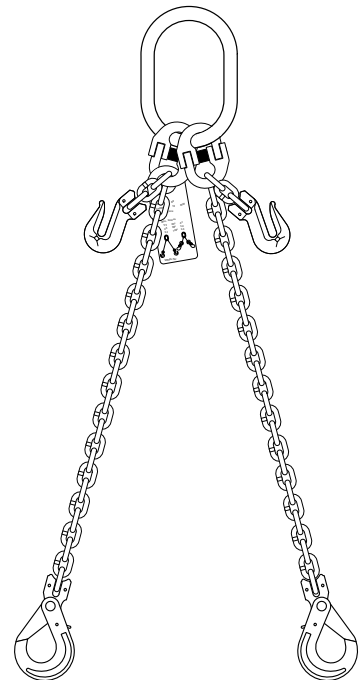

G100 Quad (4) Leg Chain Sling

(Clevis Grab Hook & Clevis Sling Hook)

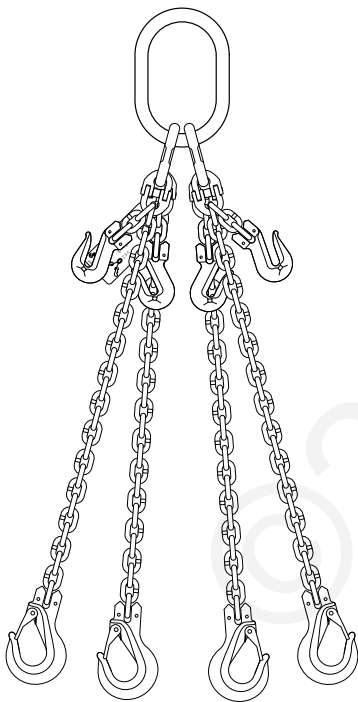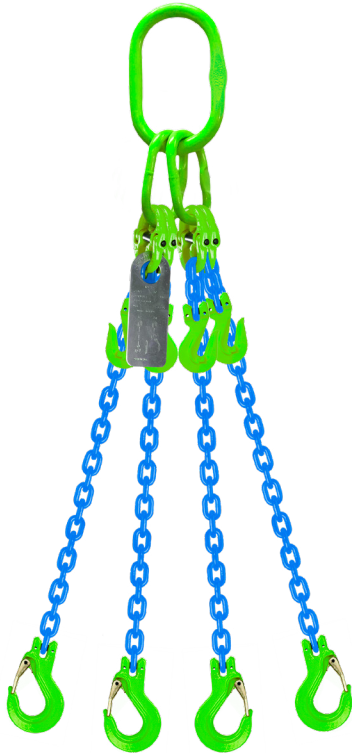

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD			SHORTENING HOOK	END FITTING
				60°	90°	120°		
6mm	962641	1M	7.84	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
	962642	2M	11.1	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
	962643	3M	14.5	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
	962644	4M	17.5	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
	962645	5M	20.8	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
	962646	6M	23.9	2.4T	2.0T	1.4T	GC-6-8	SC-6-8
8mm	962841	1M	12.0	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
	962842	2M	17.5	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
	962843	3M	23.5	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
	962844	4M	29.0	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
	962845	5M	34.5	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
	962846	6M	40.0	4.3T	3.5T	2.5T	GC-7/8-8	SC-7/8-8
10mm	963041	1M	20.5	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
	963042	2M	29.5	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
	963043	3M	38.0	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
	963044	4M	46.8	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
	963045	5M	55.6	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
	963046	6M	64.5	6.9T	5.6T	4.0T	GC-10-8	SC-10-8
13mm	963341	1M	20.1	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
	963342	2M	29.1	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
	963343	3M	38.0	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
	963344	4M	47.0	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
	963345	5M	98.0	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
	963346	6M	113.0	11.6T	9.4T	6.7T	GC-13-8	SC-13-8
16mm	963642	2M	72.5	17.3T	14.1T	10.0T	GC-16-8	SC-16-8
	963643	3M	110.0	17.3T	14.1T	10.0T	GC-16-8	SC-16-8
	963644	4M	132.5	17.3T	14.1T	10.0T	GC-16-8	SC-16-8



Test Certificate



WLL Safety tag





PVC container

G100 Quad (4) Leg Chain Sling

(Clevis Grab Hook & Clevis Self Locking Hook)

SIZE (mm)	CODE	SLING LENGTH	Wt. (kg)	DIRECT LOAD			SHORTENING HOOK	END FITTING
				60°	90°	120°		
6mm	972641	1M	6.5	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
	972642	2M	9.7	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
	972643	3M	12.9	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
	972644	4M	16.1	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
	972645	5M	19.3	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
	972646	6M	22.5	2.4T	2.0T	1.4T	GC-6-8	LC-6-8
8mm	972841	1M	12.3	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
	972842	2M	18.0	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
	972843	3M	24.0	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
	972844	4M	29.5	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
	972845	5M	35.0	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
	972846	6M	40.5	4.3T	3.5T	2.5T	GC-7/8-8	LC-7/8-8
10mm	973041	1M	21.0	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
	973042	2M	30.0	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
	973043	3M	38.5	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
	973044	4M	47.2	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
	973045	5M	56.1	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
	973046	6M	65.0	6.9T	5.6T	4.0T	GC-10-8	LC-10-8
13mm	973341	1M	38.8	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
	973342	2M	53.6	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
	973343	3M	68.3	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
	973344	4M	83.2	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
	973345	5M	98.0	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
	973346	6M	113.0	11.6T	9.4T	6.7T	GC-13-8	LC-13-8
16mm	973642	2M	74.0	17.3T	14.1T	10.0T	GC-16-8	LC-16-8
	973643	3M	111.50	17.3T	14.1T	10.0T	GC-16-8	LC-16-8
	973644	4M	134.0	17.3T	14.1T	10.0T	GC-16-8	LC-16-8

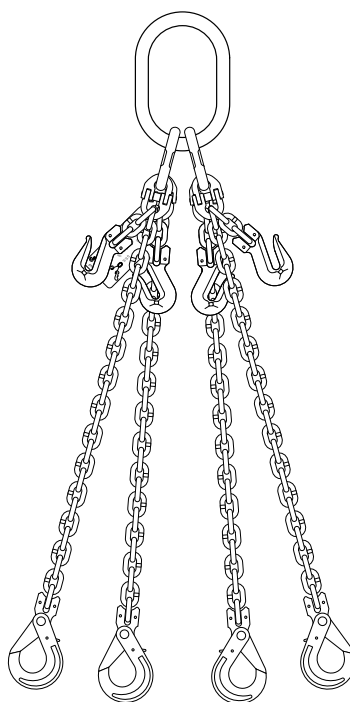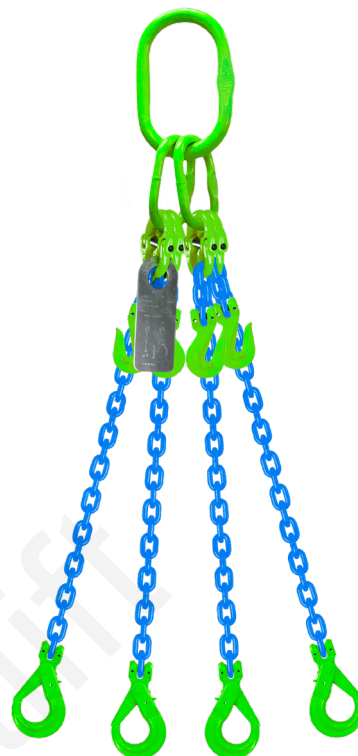

Test Certificate



WLL Safety tag



PVC container

Extreme Temperature Conditions

For G100 and G80 chain slings the in-service temperature of the whole or part of the chain sling affects the working load limit as follows:

Temperature	-40° to 200°C	200° to 300°C	300° to 400°C	Over 400°C
WLL Reduction	None	10%	25%	Do not use

 **1300 100 120**
Call for a quote

Austlift can make chain slings to your requirement.