

# ADD-ON FRONT WHEEL HOLDER

## Assembly and Usage Instructions

**For use with SeaSucker's  
Mini Bomber and Bomber bike racks.**


Included in this package:

- (1) Add-On Front Wheel Holder
  - (2) 1-1/2" button head screws
  - (2) washers
  - (2) nuts
- Assembly and Usage Instructions

Warranty and Returns:


SeaSucker offers a lifetime, non-transferable warranty covering defects in materials and workmanship. Defective products can be returned to SeaSucker for replacement or repair (at SeaSucker's option). Warranty claims must be accompanied by a sales receipt or other proof of purchase document. The cost of transportation to and from SeaSucker for the repair or replacement of any defective part or accessory is not covered by this warranty and is to be paid by the owner. This warranty does not apply to damage or failure resulting from normal use, routine wear and tear, lack of maintenance, user error, alteration of the product, accidents, abuse, or neglect. This warranty is given in lieu of all other written or oral warranties, express or implied, including without limitation implied warranties of merchantability and fitness for a particular purpose, and are limited to the duration and specifications of this warranty. SeaSucker's liability for any damages relating to any allegedly defective product, whether arising from the use or the inability to use the product and whether claimed under tort, contract or any other legal theory, shall be limited to the actual price paid for such product and shall in no event include loss of use, loss of time, incidental, consequential, special, or indirect damages of any kind, even if SeaSucker is aware of the possibility of such damages, to the full extent as such may be disclaimed by law.

Products returned to SeaSucker that are determined by SeaSucker (in our sole discretion) to be free of defects or that are no longer within the warranty period may still be repaired or replaced at your expense. Replacement parts, including vacuum pads, pumps, and hardware, can be found on-line in the Replacement Parts section at [www.SeaSucker.com](http://www.SeaSucker.com). See [www.SeaSucker.com](http://www.SeaSucker.com) for product return instructions and more information.

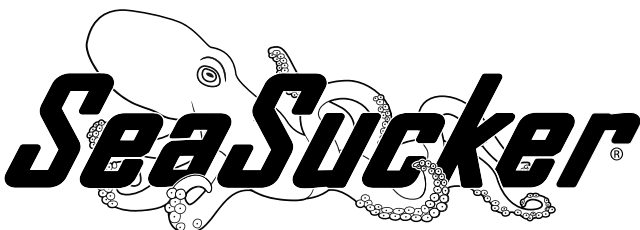

SeaSucker, LLC  
Bradenton, Florida  
[www.seasucker.com](http://www.seasucker.com)



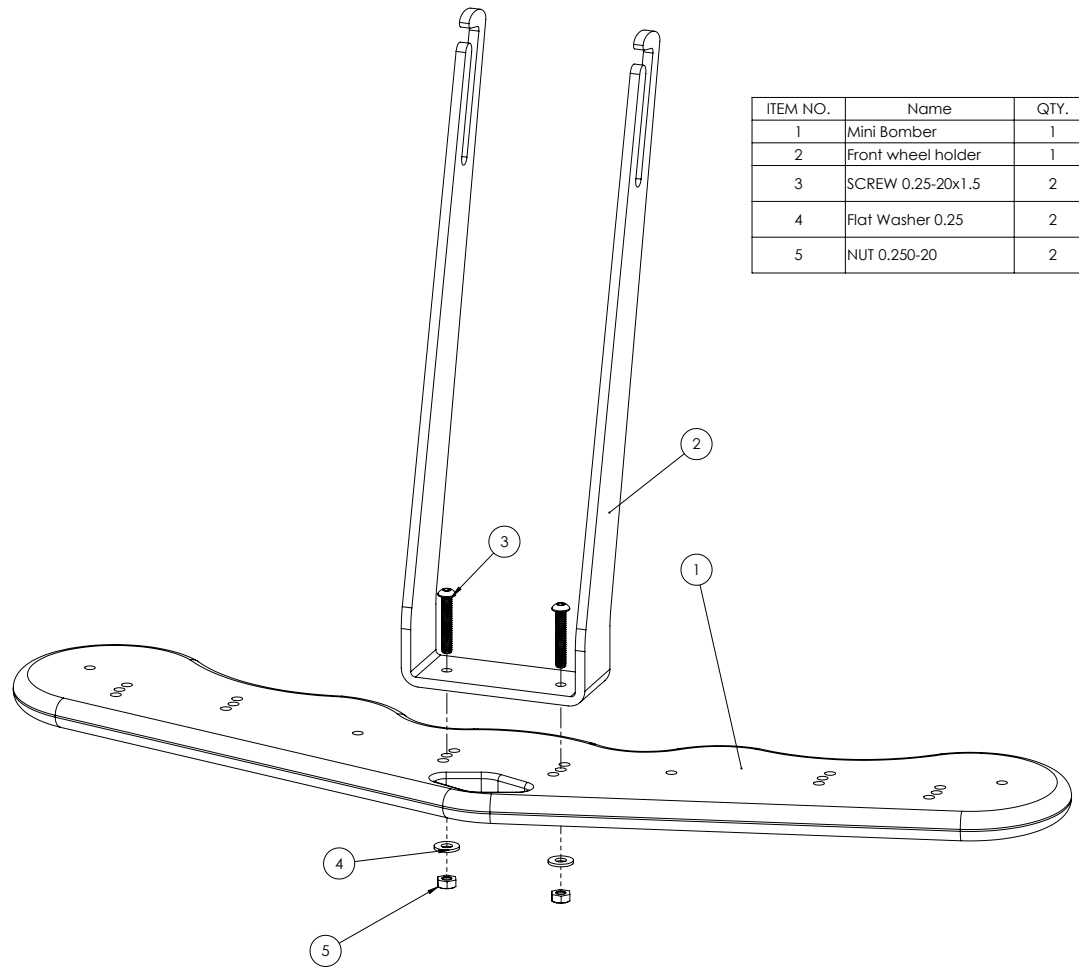

**Tools needed:**

5/32" Allen/hex wrench

7/16" (or adjustable) wrench

**Assembly:**

Determine which set of mounting holes on the platform to attach the Front Wheel Holder to. Remove the existing fork mount and riser block if necessary.

Place the 1-1/2" button head screws through the holes in the Front Wheel Holder and place it onto the platform so that the Front Wheel Holder's forks are angled towards the pumps on your rack's SeaSucker vacuum mounts. Push the screws through the holes in the platform and out through the bottom. Place a washer and a nut onto each screw. Tighten securely with wrenches.

**Mounting Your Quick-Release Front Wheel:**

Place your front wheel's quick-release skewer into the Front Wheel Holder's slots as if you were mounting your wheel to your bike's fork. Let the wheel drop all the way down into the slots until the tire is resting on the bottom of the Front Wheel Holder. Tighten your quick-release skewer normally and securely.

**Mounting Your Thru-Axle Front Wheel:**

This product is only compatible with 100mm wide through-axle wheels. You will need a set of 12mm Road Plugs or 15mm MTB Plugs, depending on your wheel's hub size. These items are available online at [www.seasucker.com](http://www.seasucker.com).

Press the 12mm Road Plugs or 15mm MTB Plugs into each side of your wheel's hub. Remove the acorn nut and spring from the