

CROP
MARKS

FRONT

FOLD
MARKS


REPLACING THE LACE ON YOUR SAEBOSTEP BRACE

STEP-BY-STEP INSTRUCTIONS

SEE THE
EASY-TO-FOLLOW
VIDEO:


Go to www.saebo.com/lace-replacement
for an instructional video and more info.

1

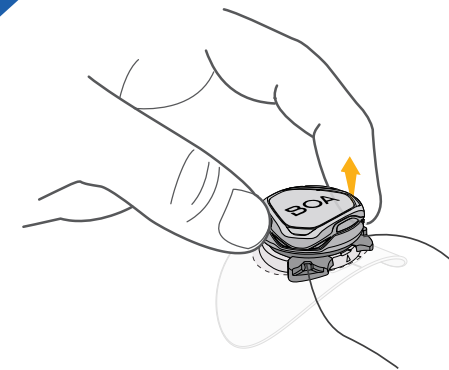


Pull dial outward to disengage spool.

2

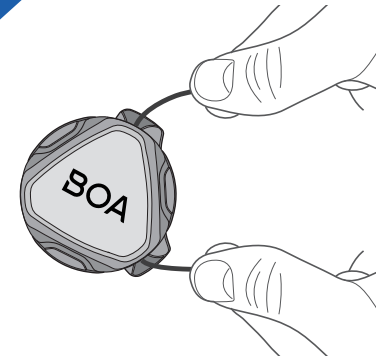


Pull on lace to unwind.

3

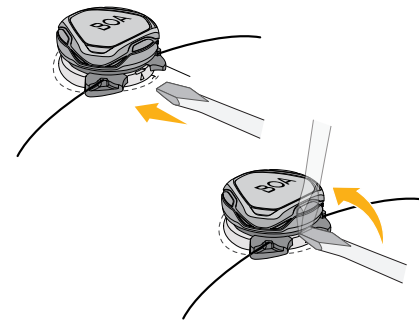


Insert flat tool in between cartridge and base
and pry upwards to release cartridge from
brace. Cartridge will pop out.

4

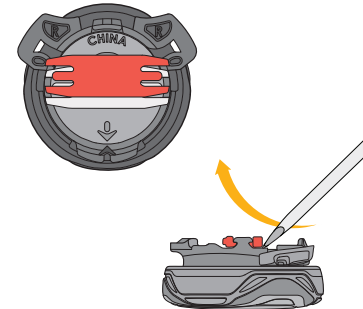


Use flat tool (such as screwdriver) to gently pry
red piece out.

5

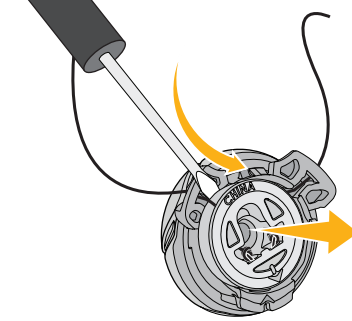


Remove spool from cartridge.

6

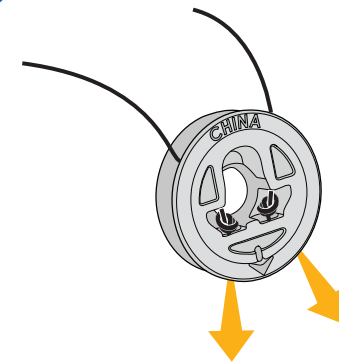


Tease the knots out of the center of the spool.

7

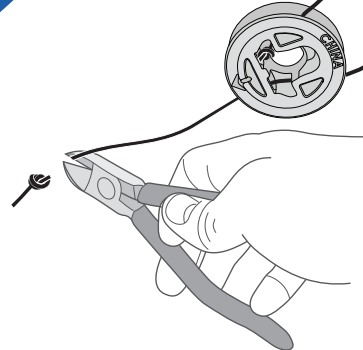

Clip off knots on both ends of lace.

8

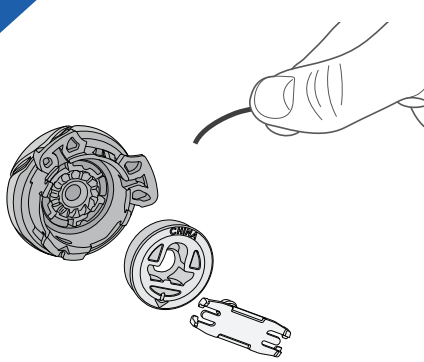


Remove lace from spool, cartridge, and brace.
Remove flexible tubing from old lace.

CROP
MARKS

BACK


FOLD
MARKS

9

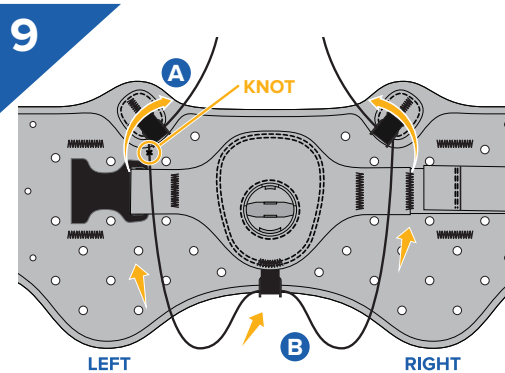


A. Thread knot end of the lace upward through
an upper guide.
B. Thread the other end through the lower guide
and then up through the opposite upper guide.

10

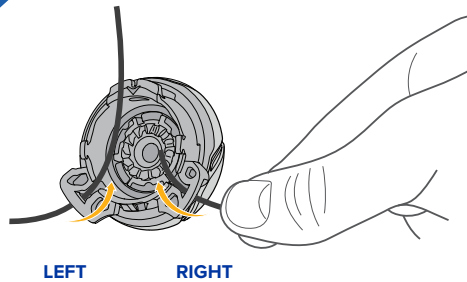

Thread both ends of lace through correct
cartridge opening.

11

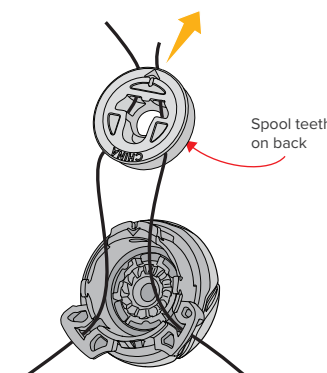


With the spool teeth facing the cartridge, thread
both ends of lace through correct openings in
spool and out through the side with the arrow.

12




Tie knots on each end of the lace as close to
the end as possible. Trim off any excess length
exceeding 1/8".

13

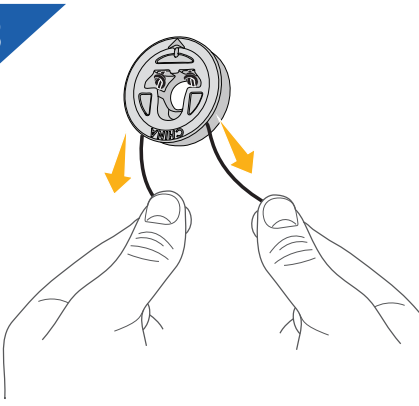


Pull the lace back through the spool so the knots
are secured in the middle of the spool. The knots
should not come out of the top of the spool.

14

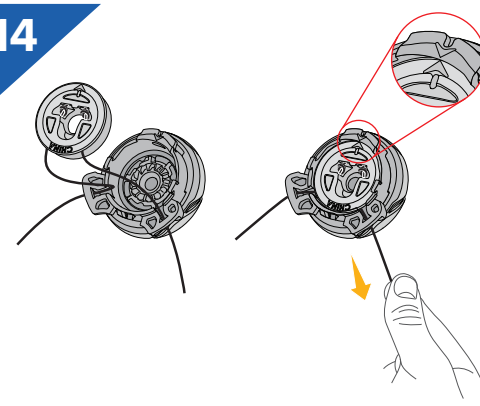

Click the cartridge and spool together so that
arrow on the spool and the arrow on the tab of
the cartridge are aligned as closely as possible.

15

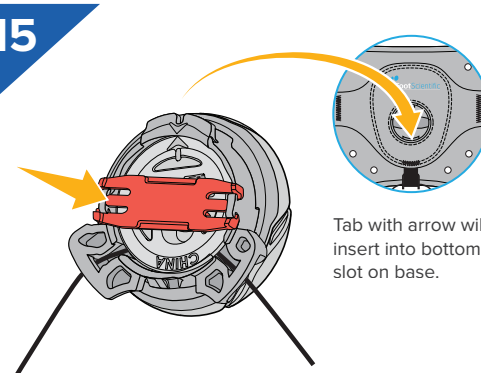

Insert red piece into the middle of the spool
horizontally as shown and push it until it clicks
and holds the spool in place.

16



Re-insert cartridge into base by putting the
bottom tab in first, then clicking the cartridge
into place.

17



Ensure that the dial is pushed in to engage the
spool, then wind the laces by twisting the dial
clockwise.

***LEAVE SLACK WHEN NOT IN USE - NEVER
WIND LACE COMPLETELY INTO THE BOA!**

Visit
www.saebo.com/lace-replacement
for more information.