


REQUIRED TOOLS




Soft Mallet



Phillips Screwdriver

PRESS-FIT BUSHING DIMENSIONS



Press-fit Bushing

STEP 1

Remove your old machine heads, screws, and bushings.

STEP 2

Check the peg-head holes to determine if any modification is needed to accommodate the press-fit bushings provided (use reamer to widen holes if needed) - You can find templates at graphtech.com/support: Drawings and Installation Guides.

STEP 3

Press in the new bushings.

STEP 4

Mount tuners & align with headstock (using a straight-edge if applicable).

STEP 5



Use fine tip marker or center punch to mark screw location.

STEP 6

Remove tuner and drill small pilot hole in marked locations.

STEP 7

Reinstall tuners with supplied screws.

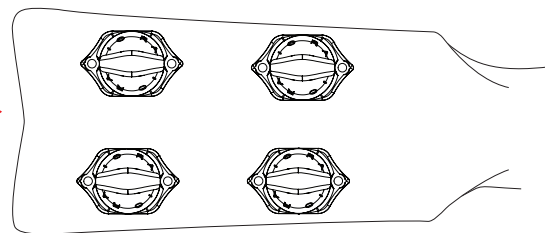

RATIO TUNE-A-LELE WEBPAGE



<https://graphtech.com/pages/tune-a-lele>



RATIO TUNE-A-LELE INSTALLATION VIDEO



<https://www.youtube.com/watch?v=zRuuBuvimXk&t=1292s>