

BlueAnt

ZONE 2


TRUE IMMERSION
ACTIVE NOISE CANCELLING HEADPHONES

USER MANUAL V1.0







WHAT'S INSIDE

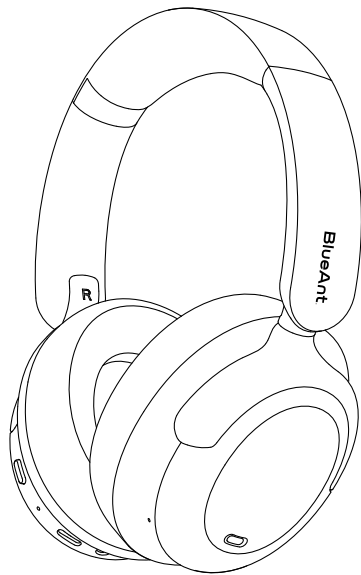


Zone 2 ANC Headphones

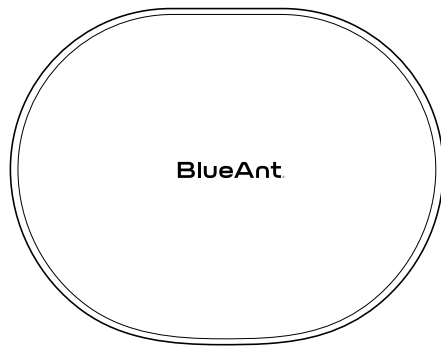


Carry Case



USB-C to USB-C cable
for charging



Airplane Adaptor




3.5mm to 3.5mm
AUX Cable



User Manual

GET TO KNOW THE ZONE 2

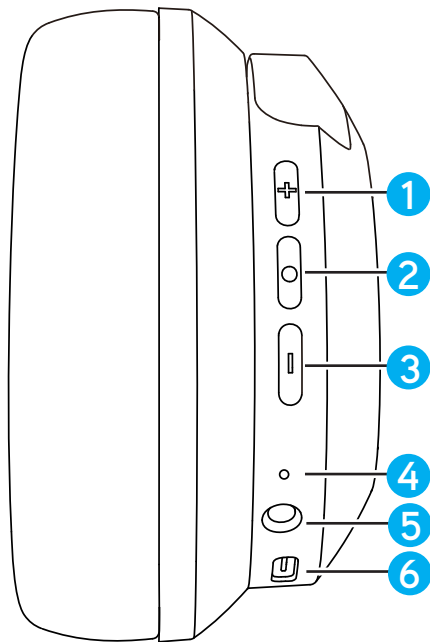

- ① Volume up
- ② Power button (Multi-function)
- ③ Volume down
- ④ LED Indicator
- ⑤ 3.5mm AUX port
- ⑥ Charging port

POWER ON & CONNECT


Power On/Off

Press and *hold* the power button for *2s*


Automatic Pairing

When you power on the Zone 2, it will automatically enter pairing mode

Connect to your device

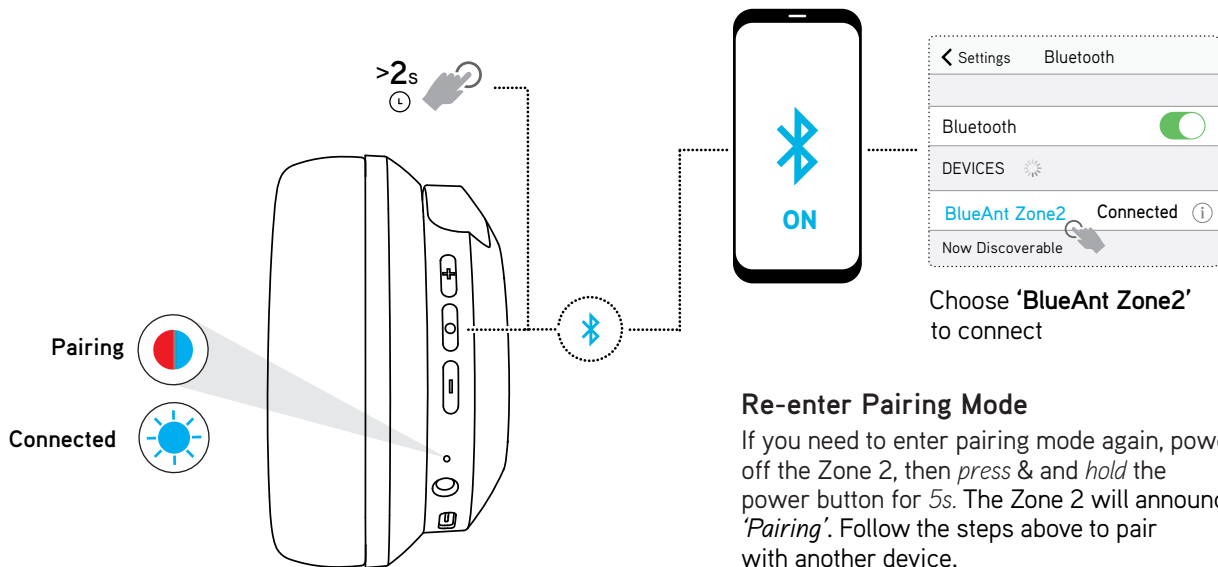

CONTROLS

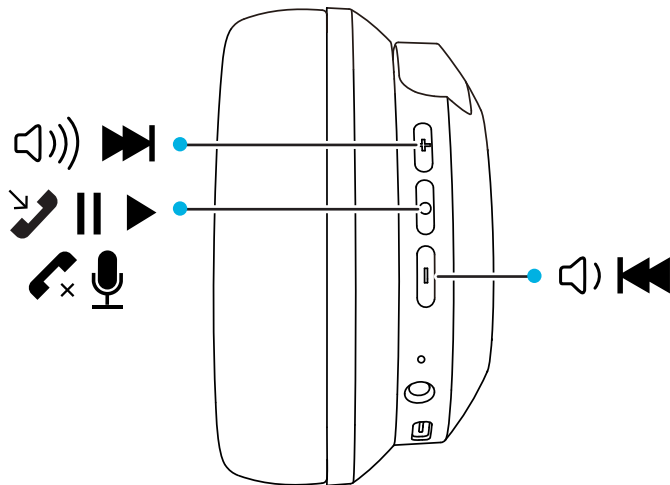

- Press once to **increase volume**
- Press and hold to **skip forward**



- Press once to **play, pause** or **answer end a phone call**



- Press twice to activate **Siri/Google**



- Press and hold 2s to **reject incoming calls**



- Press and hold to **power ON or OFF**



- Press once to **decrease volume**
- Press and hold to **skip back**

ACTIVE NOISE CANCELLATION



ANC ON

Blocks out external sounds



Transparency

Lets in external sounds



ANC OFF


Turn off noise cancellation and transparency



LOW LATENCY ON


Real-time audio sync while gaming or watching video

- Press once to cycle 3 **Noise Control Modes**
- • Double - **press to cycle Low Latency On and Off**

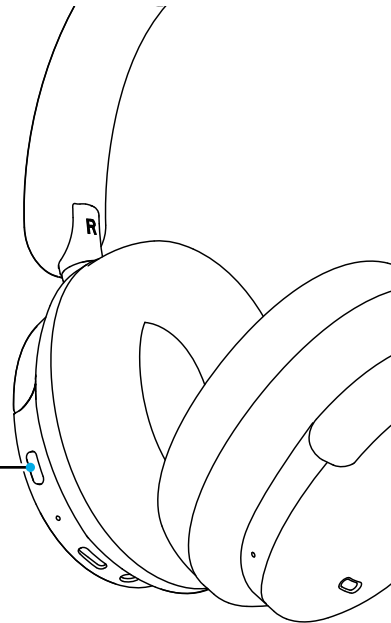

N.B. ANC can be used in Bluetooth and AUX mode

WIRED LISTENING MODE

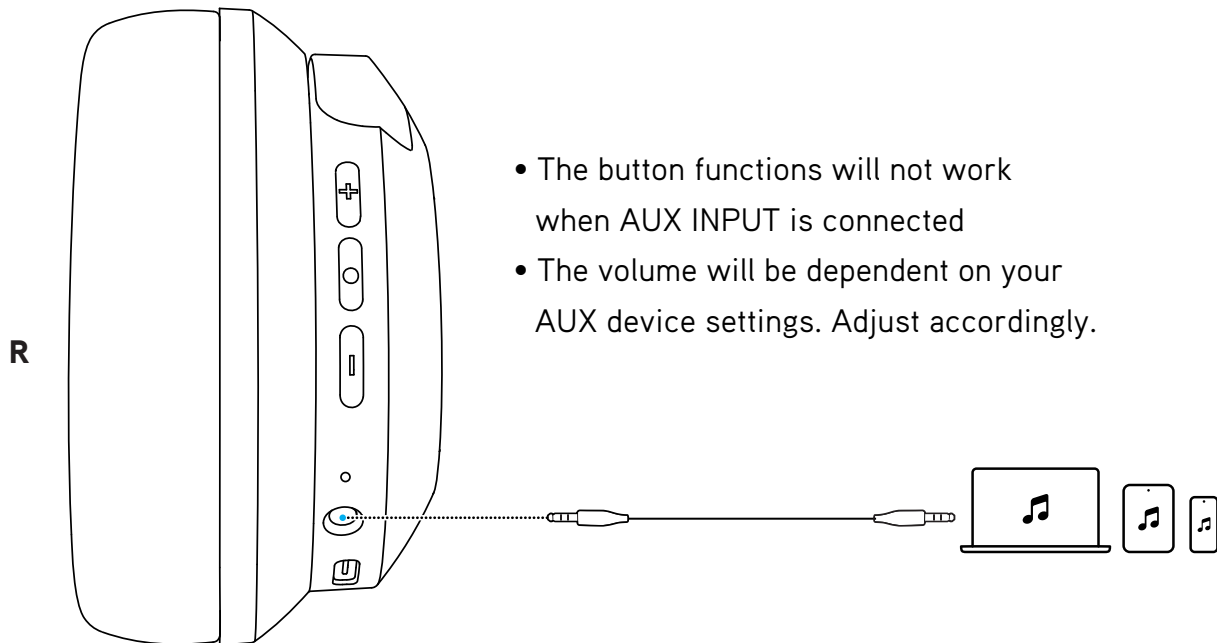

MULTI-POINT CONNECTION


Multi-point connectivity allows the Zone 2 to connect with two devices simultaneously, so you can easily switch between them

How to use Multi-point Connectivity

1 Connect the first device


Pair your first device with the Zone 2 through Bluetooth. Once connected, turn off Bluetooth on the first device to allow the Zone 2 to enter pairing mode again.

FIRST
Device

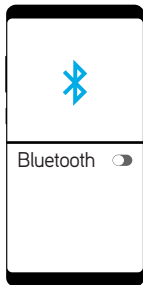

2 Connect the second device

On your second device, enable Bluetooth and connect it to the Zone 2.

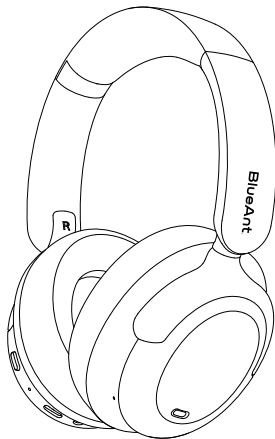


3 Reconnect the first device

Go back to your first device's Bluetooth settings, turn Bluetooth back on, and reconnect to the Zone 2. Your Zone 2 will now be connected to both devices simultaneously.

A call may come through from either device. If it is a call on your phone, you can answer it on the Zone 2. If it is a call from your computer, you will need to answer on your computer and it will come through Zone 2.

SECOND
Device

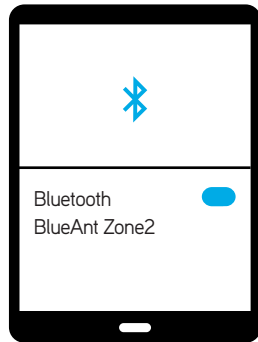

AUTO PAUSE


On-ear detection

When you remove the Zone 2 from your ears, it will automatically pause the audio being played.


Auto-pause is enabled by default and you can turn off this feature by triple-pressing the ANC button



PLAY

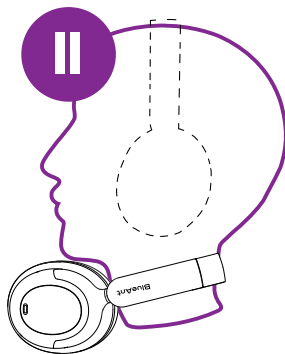


AUTO-PAUSE

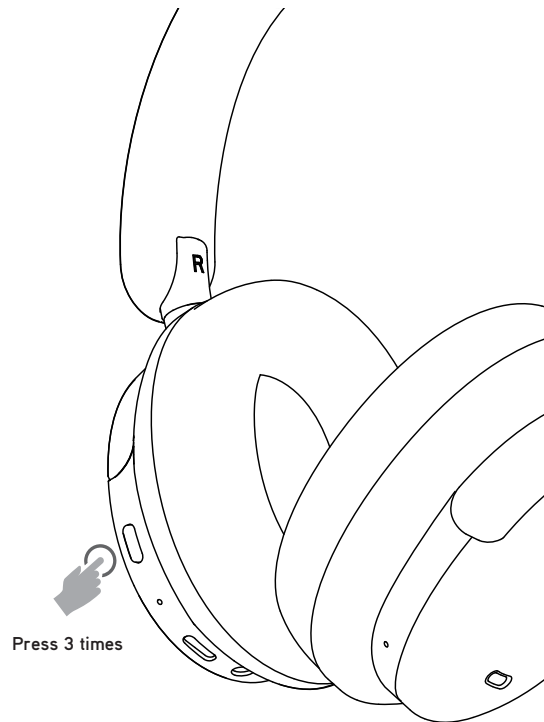

CHARGING


To charge your Zone 2, use the included USB-C cable and plug them into a power source.

When the Zone 2 is fully charged, all the lights will *turn off*.

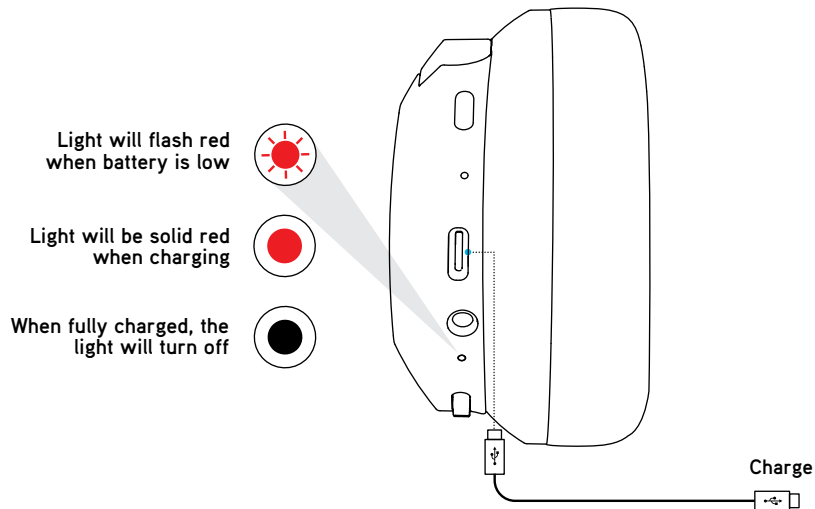

N.B. Adapter not provided; a standard USB-C phone charger is fully compatible.
The headphones cannot be turned ON for Bluetooth mode while plugged into an adapter to charge.

Connect to computer
or USB 5V 1A (or less)
output device.

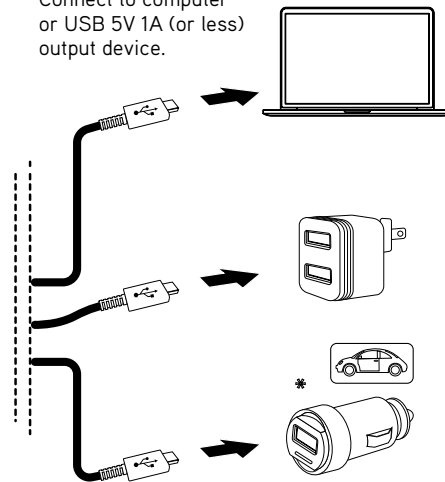

PAIRING TO COMPUTER

Windows™

To add the Zone 2 on Windows, put the Zone 2 in pairing mode.

Then in Windows, search for *Bluetooth*.

Select '*Bluetooth and other devices settings*'

Select '*Add Bluetooth or other device*'

Select '*Bluetooth*' choose '*BlueAnt Zone2*'

Then click '*Done*'

To check everything is configured correctly open *Sound* settings

Output

Choose your output device - should be set to *Headphones (BlueAnt Zone 2 stereo)*

Input

Choose your input device - should be set to *Headset (BlueAnt Zone 2 Hands-free AG Audio)*

Mac®

To add the Zone 2 on Mac, put your Zone 2 in pairing mode.


On your Mac, go to *System Preferences* and then *Bluetooth*.

Select the *BlueAnt Zone 2* from the list of devices by clicking '*connect*'.

To check everything is configured correctly go to *Sound*.
Output should be set to *BlueAnt Zone 2*
Input should be set to *BlueAnt Zone 2*

FACTORY RESET

Please delete the pairing information from your device before you Factory Reset your Zone 2

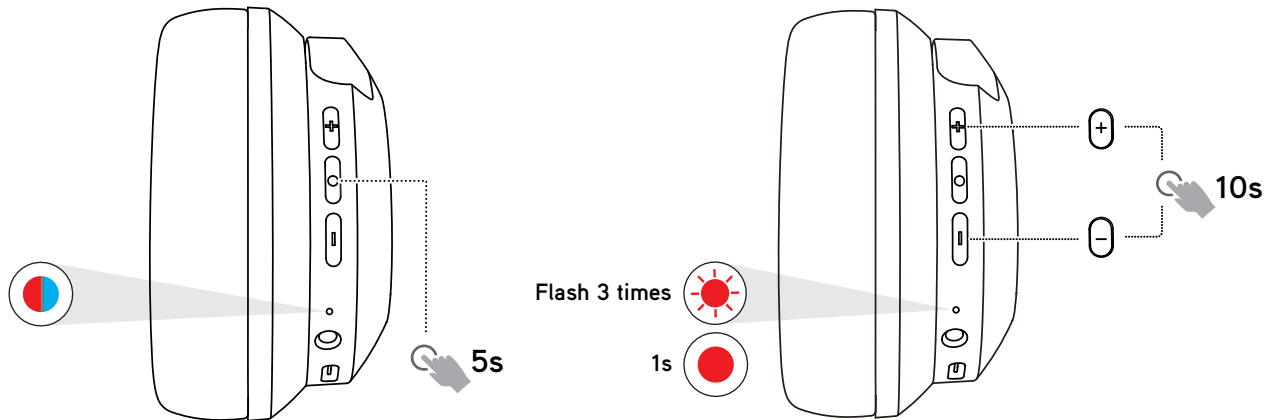

- 1 When Power is off, *press* and *hold* the power button for 5s until the LED flashes **blue** and **red**.

- 2 Keep holding +/- buttons simultaneously for 10s until you see the **red** light flashing 3 times, and then to solid red for 1s. The Zone 2 will power **OFF** automatically.

TROUBLESHOOTING

If you are having problems with your Zone 2 in Windows, check under *Audio* in the *Bluetooth and other devices* tab.

You should see the '*BlueAnt Zone2*' listed and underneath the BlueAnt Zone 2, it should say '*Connected voice, music*'.

If it only says '*Connected music*' and does not mention '*voice*', then the microphone will not work.

If this is the case please click select the '*BlueAnt Zone2*' and then click '*Remove device*'.

When prompted if you '*Are sure you want to remove this device?*', click '*Yes*'.

Please save anything you were doing and reboot your computer

While this is happening, perform a factory reset on your Zone 2.

You can do this when not connected to any devices by pressing and holding *Vol +* and *Vol -* for 10s

The Zone 2 will announce that '*Factory Reset is complete*' and then power down.

Once your computer has rebooted, go back to the *Bluetooth and other devices* menu and click '*Add bluetooth or other device*' again. Click on '*Bluetooth*'.

TROUBLESHOOTING CONT'D...

Power on the Zone 2 to go into pairing mode

Please wait for the '*BlueAnt Zone 2*' to appear on the computer and select it.

Check it says it is '*Connected for voice, music*'

If so, click *done*, close the settings tab.

To check everything is configured correctly, open sound settings

Output

Choose your output device - should be set to

Headphones (BlueAnt Zone 2 stereo)

Input

Choose your input device - should be set to

Headset (BlueAnt Zone 2 Hands-free AG Audio)

SAFETY INFORMATION AND WARRANTY TERMS

Important Safety Information

**PLEASE READ THIS ENTIRE DOCUMENT
CAREFULLY, BECAUSE IT CONTAINS
IMPORTANT INFORMATION ABOUT THE
SAFE USE OF BLUEANT DEVICES**

**PROLONGED USE AT HIGH
VOLUMES MAY AFFECT YOUR
HEARING CAPACITY AND MAY
RESULT IN NOISE INDUCED
HEARING LOSS (NIHL).
TURN OFF THE POWER TO
YOUR DEVICE WHEN NOT
IN USE.**

Please ensure that the device and any associated components such as ear gels or chargers, are stored safely and that any packaging or unwanted contents are disposed of thoughtfully. Do not place the product on the floor or leave it in a place, where young children could access it, or someone could trip over it

Care and Handling

Your BlueAnt Bluetooth device is a precision engineered instrument. To ensure its ongoing performance, you should look after it as you would any quality consumer electronic product, and use it in accordance with the instructions. BlueAnt recommends that you take the following precautions.

- Avoid leaving your device in direct sunlight, such as on the dashboard or console of a car or truck. Do not leave your device unattended in your vehicle.
- Do not leave your device, or use your device, in any area where the temperature may exceed 45 degrees Centigrade (113 Degrees Fahrenheit), such as inside a closed car on a hot day. Remember that on a hot day the temperature inside a closed car may be significantly higher than the outside air temperature.
- Do not leave your device, or use your device, in any area exposed to humidity, dust, soot, other foreign objects, smoke, or steam as this may cause your device to malfunction.

- Do not use any household or industrial grade detergents or cleaners to clean your device. If your device becomes dirty or smeared, in most instances, a wipe with a dry or slightly damp cloth should be sufficient to clean it.
- Do not leave your Bluetooth device, plugged into a wall or car charger for long periods after it is fully charged. BlueAnt does not recommend long periods of continued charging.
- Before charging your BlueAnt device, make sure that the AC outlet, adaptor and cable are not damaged. If you notice any abnormalities, seek advice from a qualified professional.
- If travelling internationally, ensure that your BlueAnt wall or car power adapter is approved for use in the country where you plan to use it and that the adapter voltage is suited to the local power supply.
- Should a fault develop with your BlueAnt product, contact BlueAnt for advice on how to proceed. Do not attempt to repair or alter any BlueAnt product yourself.

Approved Accessories

The use of accessories not approved by BlueAnt, including but not limited to batteries, antennas, wall adapters, car chargers, ear gels, foam tips and convertible covers, may cause your BlueAnt device to malfunction, or in the case of non-approved electrical accessories, may cause the device to exceed RF energy exposure guidelines. Use only 5V/1A chargers.

Use of non approved accessories will void your device's warranty. For a list of approved BlueAnt accessories, visit our website www.blueantwireless.com

Electromagnetic Interference

Nearly every electronic device is susceptible to electro-magnetic interference (EMI) if inadequately shielded, designed, or otherwise for electromagnetic compatibility.

Similar to a mobile phone, your BlueAnt device is a low power transmitter/receiver and is covered by regulations in any facility where posted notices instruct you to do so. These facilities may include hospitals or health care facilities that may be using equipment that is sensitive to external RF energy.

- When instructed to do so, turn off your BlueAnt device when you board an aircraft. Any use of a mobile device must be in accordance with applicable laws, regulations and airline crew instructions.
- Some Bluetooth devices may interfere with some hearing aids. In the event of such interference, you may want to consult your hearing aid manufacturer or physician to discuss alternatives.
- If you use any other personal medical device, consult the manufacturer of your device to determine if it is adequately shielded from RF energy. Your doctor or physician may be able to assist you in obtaining this information.
- If you are in doubt whether your BlueAnt device or mobile phone can be safely turned on or used, please consult an authorised person in the location you want to use your BlueAnt device. If no authorised person is available, or you remain uncertain, BlueAnt recommends that you turn off your Bluetooth device and any mobile phones unless they are required in an emergency situation.

**WARNING - PROTECT
YOUR HEARING**

**BLUEANT DEVICES CAN
REACH VOLUMES ABOVE
100 DECIBELS.**

**ONLY CHARGE
WHEN DEVICE IS
CLEAN AND DRY**

BlueAnt Limited Global Warranty

This product is covered by BlueAnt's limited global warranty for one (1) year from the date of purchase, or if later, the date of delivery.

Please refer to the **warranty.blueantwireless.com** for full terms and conditions.

Register your BlueAnt product for warranty and new product updates at **register.blueantwireless.com**

THANK YOU FOR CHOOSING A BLUEANT PRODUCT

Caring for the Environment by Recycling

Do not dispose of Bluetooth accessories, such as chargers or headsets, with your household waste. In some countries or regions, collection systems are set up to handle electrical and electronic waste items, and may prohibit or restrict how such items are disposed of. Check the laws and regulations for your areas to determine how to properly dispose of such items. Contact your regional authorities for more details.



AUSTRALIAN CONSUMER LAW

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

For warranty and technical support, please email **care@blueantwireless.com** visit: **www.blueantwireless.com** or call 1300 669 049

BlueAnt Wireless
4A Paran Place
Glen Iris, VIC 3146, Australia

ZONE 2 INFORMATION

PRODUCT REGISTRATION

Scan me to
register and
extend your
Zone 2 warranty
from 1 to 2 years



ONLINE MANUAL

Scan me to view
the Zone 2 user
manual online



FAQ's

Scan me to
view the
Zone 2 FAQ's



BlueAnt

100% AUSTRALIAN
DESIGNED & OWNED



REGISTER & SCAN TO EXTEND YOUR WARRANTY

Register your BlueAnt product for warranty and new product updates by scanning the QR Code.

HELP & SUPPORT

Visit support.blueantwireless.com

Email: care@blueantwireless.com

Or Call: 1300 669 049



blueantwireless.com