

Pet-Tech Australia Remote Training Collar



Features


- Rechargeable remote and rechargeable receiver
- IPX5 water resistance – for all weather use
- The level of shock and vibration are both adjustable through 99 levels meaning it can be tailored to a wide range of dogs and scenarios
- Four training modes: Shock/Vibration/Sound/Light
- Three Channels: Pair the remote with up to 3 collars. Spare collars are always available at Pet-Tech
- Auto Power Saving mode: The Remote and Receiver will go into standby mode if the device has not been used for 5 minutes

Tips

- Please charge for 6 hours before first use
- Before using the shock mode, try vibration to your pet at first – this does the job for most of our customers
- Observe the dog's reaction. Always start on a low level and only increase it if absolutely necessary.

Product details

1. Antenna
2. LED light: Press ⑩ to turn on and off.
3. LCD screen: Show the modes/settings
4. Shock button: press to choose shock mode, press + or - buttons to adjust the level, press again to shock
5. Vibrate button: press to choose shock mode, press + or - buttons to adjust the level, press again to vibrate
6. Sound button: press to send a 'beep' to the receiver
7. - button: press - to reduce the level of shock/vibrate.
8. + button: press + to increase the level of shock/vibrate.
9. Channel button: choose your training channel (ie switch quickly between dogs)
10. Light button: Press to turn on/off the LED on the remote. Long press to turn on/off the LED on the receiver. (for a maximum 10 seconds on the receiver)
11. Remote charging port

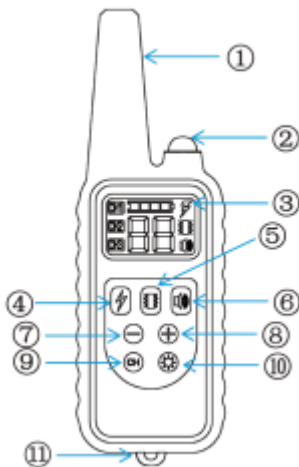

12. Power button: press once to turn on the Receiver, press again to turn it off

13. Receiver charging port

14. Contact points

15. Indicator light: the light will flash when the shock/vibration/sound buttons are pressed. It is also on during charging.



Charging

- Please charge the Remote and the Receiver before first use (6 hours)
- The unit comes with a split cable so you can charge your receiver and remote at the same time (or 2 receivers).

Charging the Remote

- Connect the USB charge adapter and plug it into a wall outlet or 5v USB port
- While charging, the battery icon on the screen will flash
- When fully charged, the icon will be solid

Charging the Receiver

- Plug the cable into the charging port on the receiver.
- While charging, the LED on the receiver will flash
- When fully charged, the LED will be solid

Note - If the Receiver is running low on power, the indicator LED will flash once every second.

Please charge them fully before any long periods of little to no use, it's good for battery life to charge them at least every month.

Auto Power Saving Function:

If the device has not been used for 10 seconds, the back light on the screen will turn off and after 30 seconds, the remote will go into sleep mode, the screen display will shut off. Press any button to 'wake up' the remote. If you want to send a sound signal – press sound once to wake up the remote and a second time to send the signal.

Pairing the receivers with the remote:

Note – they should come paired out of the box and this won't be necessary.

1. Press the shock button or vibration button to turn on the Remote
2. Choose the channel you want to pair to, using the CH button
3. Adjust the level by pressing + or — button (must be on 1 or higher)
4. Hold the Power button on the Receiver for 3 seconds, you will hear a 'beep', and the indicator light will start flashing; Then quickly, Press the vibration button or Shock button (within 10 seconds).
You will hear a second 'Beep' which means the pairing was successful.
5. If you have 2 or 3 receivers, just select the next channel, and repeat the above steps with each receiver.

Test the training collar set

1. Test the Shock function

Take out the test bulb and put it on both the receiver's contact points. Press the Shock button (shock must be on level 1 or higher)

The test bulb will light up.

2. Test the Vibration function

Press the Vibration button (vibrate must be on level 1 or higher)

The receiver will vibrate.

3. Test the Sound function

Press the Sound button.

The Receiver will beep twice (you cannot adjust the level)



How to position the collar:
Put the collar on so the receiver is under the dog's neck.

Make sure the contact point reaches the dogs skin (not vital if you don't intend on using the shock feature)

If your dog has long hair, you may need to use the extension caps.

Adjust the belt collar, make your dog comfortable, you should be able to get a few fingers easily under the collar. Not too tight.



Q: Is the Receiver waterproof?

A: No, it is IPX5 rated which means it can be used in all weather conditions but cannot be submerged. Water damage will void the warranty.

Q: What should I do if the training collar set isn't working as it should?

1. Check the battery level of the remote and receiver, if low, charge them.
2. Check the level (shock or vibrate must be on a level greater than 0)
3. Check the Receiver is powered on.
4. Check the channel is on the correct receiver.
5. Repair the remote with the receiver.

If none of the above work, contact us and we will be glad to help. Use the chat feature on our website.

Pet-Tech Australia



