



ANDROID PHONE & ANDROID PHONE IN A CASE

You can configure the Mirage Trio Trio USB Charging Station to charge Android phones, whether installed in a case or not. The Mirage Trio ships from our factory pre-configured for Apple Lightning phones. Follow these steps to make the Mirage Trio ready to charge your Android devices.


1. Carefully peel off the protective feet from the bottom of the Mirage Trio, revealing four screws.

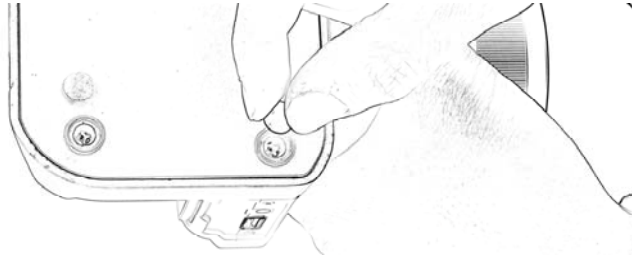

2. Using the kit's included screwdriver, unscrew the four screws to remove the bottom of the Mirage Trio.
3. Carefully peel off the rear platform's protective rubber mat, just far enough to expose the black plastic Cable Support (black plastic support holding the charger cable vertically).

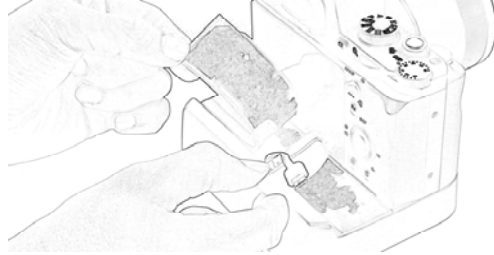

4. Unplug and remove the Apple Lightning cable and the Cable Support, and set both aside in a safe place. We will be replacing both for Android devices.
5. Your Mirage Trio kit includes an Android cable, and the special Cable Support for it.
6. Insert the Android Cable into its custom-fitted Cable Support. If your phone is in a thicker case, you may need to use a Cable Riser Insert clip (round white clip with alignment tab) from your kit to provide additional height for the Micro USB connector.
7. Ensure that the Micro USB connector is firmly seated inside the Cable Support, and reseal the Cable Support back into the base. Replace the cable into the Strain Relief Channel, and plug into the internal USB jack.

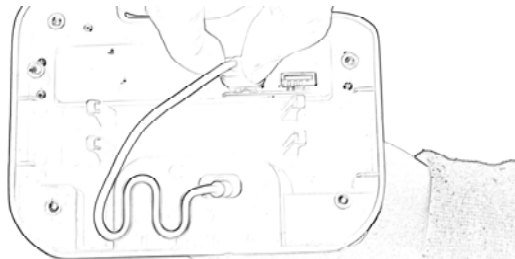

8. Screw the bottom back onto the Mirage Trio.
9. Reinstall the four protective feet back over the screw holes, and replace the rear platform's protective mat (there are spares of each included in the kit if you need them)

MIRAGE CRAFTMASTER

ESTABLISHED 2016 IN CHICAGO USA.

POWERED BY FOTODIOX

THE MIRAGE TRIO USB CHARGING STATION

Congratulations on your purchase of the Mirage Trio Trio USB Charging Station. The Mirage Trio Trio lets you simultaneously charge up to 3 devices, and it's all contained in a handsome camera replica so realistic that you'll feel you can pick it up and start taking pictures! The rear platform can charge Apple Lightning or Android devices, a full-sized USB jack on the side will charge any USB device, and there's an integrated compartment within the replica lens for an Apple Watch charger.

The Mirage Trio Trio is very simple to use, with a robust build to ensure years of trouble-free service. The rear charging platform and the replica eyepiece are soft silicone to keep your phone safe and scratch free. Please take a few moments to read these instructions before using the Mirage Trio with your specific phone. We have included several options to customize the Mirage Trio to your specific phone and phone case.

IN THE BOX

Please familiarize yourself with the various components of the Mirage Trio USB Charging Station, refer to the included pamphlet in the box. It takes only a few minutes to make the Mirage Trio the perfect fit for your phone and case.

GETTING STARTED

First, let's mount the replica lens on the Mirage Trio camera body. Remove the circular cap from the camera body by turning it counter clockwise.

Install the lens by lining up the red dot at the rear of the lens with the red dot on the camera body. Insert and turn clockwise until Apple Watch Charger compartment is facing upwards. Remove the lens cap to reveal the simulated front lens.

PRO TIP: The lens connection on the Mirage Trio is styled after a Sony E-Mount. You can mount a genuine E-Mount lens, or any other brand lens via a lens adapter. See our demo video on YouTube!

You're now ready to start charging your phone!

APPLE iPhone

The Mirage Trio ships pre-configured to charge Apple Lightning phones. Simply plug the included AC adapter's plug into the side of the Mirage Trio (AC jack is located under the side USB connection), and the other end into an outlet. Connect your phone to the platform's built-in Lightning connector, and lean your phone against the silicone replica "eyepiece". Your phone will charge as normal.

CHARGING ANY USB DEVICE

There is an additional full-sized USB type A connector on the side of the camera that can charge tablets, game consoles - anything USB! The Mirage Trio features 1amp on all USB connectors for added charging speed

HOW-TO VIDEOS, AND MORE!



Visit [Youtube.com](https://www.youtube.com) and search "Fotodiox Mirage" for our how-to assembly videos. We'll show you how to add a real vintage lens onto your Mirage Trio for an authentic look, as well as some of the crazy USB devices that we've plugged into ours!

ADJUSTING THE HEIGHT OF THE APPLE LIGHTNING CONNECTOR

Some iPhone cases are thick enough to interfere with the phone's ability to firmly seat onto the Mirage Trio's Lightning connector. We have included a Cable Riser Insert (a small white ring with an outer tab) for this situation. Here's how to install it:

1. Carefully peel off the protective feet from the bottom of the Mirage Trio, revealing four screws.
2. Using the kit's included screwdriver, unscrew the four screws to remove the bottom of the Mirage Trio.
3. Inside the Mirage Trio, temporarily unplug the short USB cord from the internal USB jack.



4. Remove the cable from the Strain Relief Channel.



5. Carefully peel off the rear platform's protective rubber mat, just far enough to expose the black plastic Cable Support (black plastic support holding the charger cable vertically).




6. Push the Lightning cable slightly out of the Cable Support, and clip on the white Cable Riser Insert. One Cable Riser Insert is already installed. Depending on your needs, you can add the second Cable Riser Insert, or remove them altogether.
7. Slide everything back into the Cable Support, ensuring that the Cable Riser Insert's tab fits into the Cable Support's groove.
8. Ensure that the lightning connector is firmly seated inside the Cable Support, and reseat the Cable Support back into the base. Replace the cable into the Strain Relief Channel, and replace plug in the internal USB jack.
9. Screw the bottom back onto the Mirage Trio.
10. Reinstall the four protective feet back over the screw holes, and replace the rear platform's protective mat (there are spares of each included in the kit if you need them)


APPLE WATCH CHARGER

The replica lens that's part of the Mirage Trio USB Charger has a built-in compartment for your Apple Watch's charger. Follow these steps to install your Watch charger into the Mirage Trio, and then you can recharge your watch by simply placing it around the lens!


1. Carefully peel off the protective feet from the bottom of the Mirage Trio, revealing four screws.
2. Using the kit's included screwdriver, unscrew the four screws to remove the bottom of the Mirage Trio.
3. Apply one side of the round double-sided adhesive disc from the kit to the bottom of your Watch charger (not included).
4. Remove the Mirage Trio's "lens" from the camera body. The Watch charger's cable out fits into the channel at the rear of the "lens". Peel to expose the adhesive on your Watch Charger, and insert the charger firmly into its special compartment, and press down.

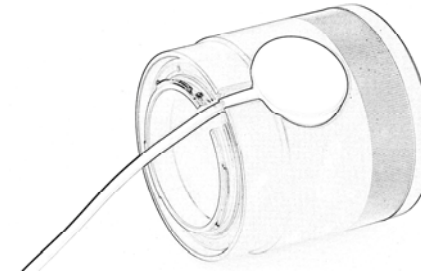

5. Thread the excess cable through the Mirage Trio's lens opening, and reattach the lens.

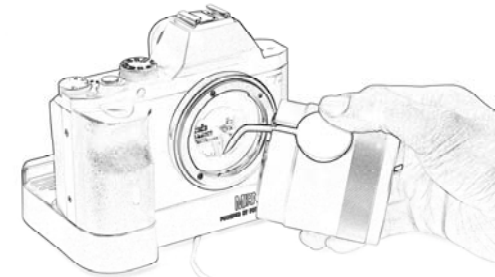

6. Wrap the excess Watch Charger's cord around the posts in the Mirage Trio's base. Alternatively, you can gather the excess cable with a rubber band and fit it into the open space inside the camera's body.

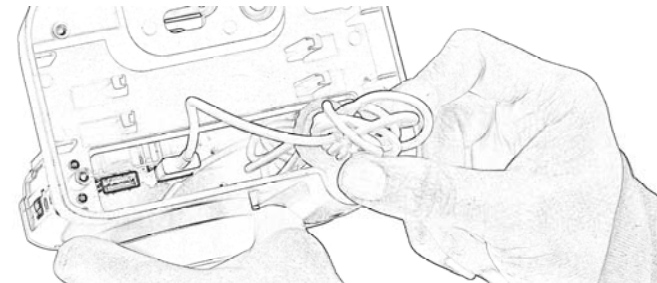

7. Plug the cable into the free internal USB port.
8. Replace the bottom cover, and reinstall screws and rubber feet. (there are spare rubber feet included in the kit if you need them).