

## OVERTURE ABS TECHNICAL DATA SHEET

**OVERTURE ABS is made with a specialty ABS resin, which has significantly lower volatile content compared to traditional ABS resins. It delivers excellent printing quality with minimal odor during printing.**

### Physical Properties

Property	Testing method	Typical value
Density	ISO 1183, GB/T 1033	1.15 (g/cm <sup>3</sup> at 21.4 °C)
Vicat Softening temperature*	ISO 306 GB/T 1633	103.4 (°C)
Melt index	220 °C, 2.16 kg	13.8 (g/10 min)
Melting temperature	DSC, 10°C/min	N/A

Tested with 3D printed specimen of 100% infill

### Mechanical Properties

Property	Testing method	Typical value
Young's modulus (X-Y)	ISO 527, GB/T 1040	2190 ± 269 (MPa)
Tensile strength (X-Y)	ISO 527, GB/T 1040	33.6 ± 0.7(MPa)
Tensile strength (Z)	ISO 527, GB/T 1040	30.3 ± 0.9(MPa)
Elongation at break (X-Y)	ISO 527, GB/T 1040	2.7 ± 0.5 (%)
Bending modulus (X-Y)	ISO 178, GB/T 9341	2854 ± 417 (MPa)
Bending strength (X-Y)	ISO 178, GB/T 9341	72.3 ± 0.6 (MPa)
Notched Charpy impact strength (X-Y)	ISO 179, GB/T 1043	12.6 ± 0.7 (kJ/m <sup>2</sup> )

All testing specimens were printed under the following conditions: nozzle temperature = 255 °C, printing speed = 60 mm/s, build plate temperature = 100 °C, infill = 100% All specimens were conditioned at room temperature for 24h prior to testing

### Recommended printing conditions


Nozzle temperature	245 - 265 (°C)
Build Surface material	OVERTURE Build Surface, Textured PEI
Build surface treatment	None
Build plate temperature	90 - 105 (°C)
Cooling fan	Turned off
Printing speed	30-50 (mm/s)
Raft separation distance	0.1-0.2 (mm)
Retraction distance	1-3 (mm)
Retraction speed	20-40 (mm/s)
Threshold overhang angle	50 (°)

Based on 0.4 mm nozzle. Printing conditions may vary with different nozzle diameters

### Disclaimer:

The typical values presented in this data sheet are intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes. Actual values may vary significantly with printing conditions. End- use performance of printed parts depends not only on materials, but also on part design, environmental conditions, printing conditions, etc. Product specifications are subject to change without notice.

Each user is responsible for determining the safety, lawfulness, technical suitability, and disposal/recycling practices of OVERTURE materials for the intended application. OVERTURE makes no warranty of any kind, unless announced separately, to the fitness for any use or application. OVERTURE shall not be made liable for any damage, injury or loss induced from the use of OVERTURE materials in any

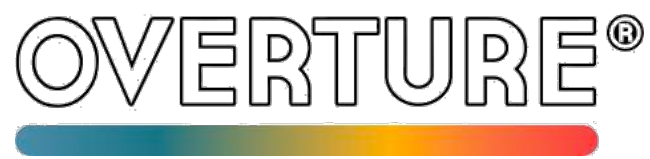

July. 2024

Version 5.1

application.